

General Information	1
Interchangeability Guide	2
Glossary/Timing Conventions/Data Sheet Structure	3
Dynamic RAMs	4
Dynamic RAM Modules	5
EPROMs/PROMs	6
ROMs	7
Military Products	8
Applications Information	9
Logic Symbols	10
Mechanical Data	11
ESD Guidelines	12



#### ATTENTION

These devices contain circuits to protect the inputs and outputs against damage due to high static voltages or electrostatic fields; however, it is advised that precautions be taken to avoid application of any voltage higher than maximum-rated voltages to these high-impedance circuits.

Unused inputs must always be connected to an appropriate logic voltage level, preferably either supply voltage or ground.


Additional information concerning the handling of ESD sensitive devices is provided in Section 12 in a document entitled "*Guidelines for Handling Electrostatic-Discharge-Sensitive (ESDS) Devices and Assemblies.*"

# TMS2732A

## 32,768-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

AUGUST 1983 — REVISED NOVEMBER 1985

- Organization . . . 4096 X 8
- Single 5-V Power Supply
- All Inputs and Outputs Are TTL Compatible
- Max Access/Min Cycle Time
  - TMS2732A-17 170 ns
  - TMS2732A-20 200 ns
  - TMS2732A-25 250 ns
  - TMS2732A-45 450 ns
- Low Standby Power Dissipation . . . 158 mW (Maximum)
- JEDEC Approved Pinout . . . Industry Standard
- 21-V Power Supply Required for Programming
- N-Channel Silicon-Gate Technology
- PEP4 Version Available with 168 Hour Burn-in and Guaranteed Operating Temperature Range from -10°C to 85°C (TMS2732A--JP4)

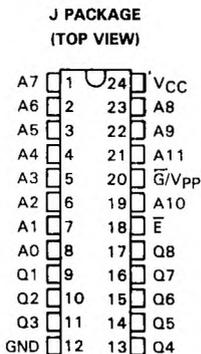

PIN NOMENCLATURE	
A0-A11	Address inputs
$\bar{E}$	Chip Enable
$\bar{G}/V_{pp}$	Output Enable/21 V
GND	Ground
Q1-Q8	Outputs
VCC	5-V Power Supply

### description

The TMS2732A is an ultraviolet light-erasable, electrically programmable read-only memory. It has 32,768 bits organized as 4,096 words of 8-bit length. The TMS2732A only requires a single 5-volt power supply with a tolerance of  $\pm 5\%$ .

The TMS2732A provides two output control lines: Output Enable ( $\bar{G}$ ) and Chip Enable ( $\bar{E}$ ). This feature allows the  $\bar{G}$  control line to eliminate bus contention in multibus microprocessor systems. The TMS2732A has a power-down mode that reduces maximum power dissipation from 657 mW to 158 mW when the device is placed on standby.

This EPROM is supplied in a 24-pin dual-in-line ceramic package and is designed for operation from 0°C to 70°C.

6  
EPROMs/PROMs

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 1443 • HOUSTON, TEXAS 77001

Copyright © 1985, Texas Instruments Incorporated

# TMS2732A 32,768-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

## operation

The six modes of operation for the TMS2732A are listed in the following table.

FUNCTION (PINS)	MODE					
	Read	Deselect	Power Down (Standby)	Program	Program Verification	Inhibit Programming
$\bar{E}$ (18)	$V_{IL}$	X	$V_{IH}$	$V_{IL}$	$V_{IL}$	$V_{IH}$
$\bar{G}/V_{PP}$ (20)	$V_{IL}$	$V_{IH}$	X	21 V	$V_{IL}$	21 V
$V_{CC}$ (24)	5 V	5 V	5 V	5 V	5 V	5 V
Q1-Q8 (9 to 11, 13 to 17)	Q	HI-Z	HI-Z	D	Q	HI-Z

X =  $V_{IH}$  or  $V_{IL}$

### read

The two control pins ( $\bar{E}$  and  $\bar{G}/V_{PP}$ ) must have low-level TTL signals in order to provide data at the outputs. Chip enable ( $\bar{E}$ ) should be used for device selection. Output enable ( $\bar{G}/V_{PP}$ ) should be used to gate data to the output pins.

### power down

The power-down mode reduces the maximum power dissipation from 657 mW to 158 mW. A TTL high-level signal applied to  $\bar{E}$  selects the power-down mode. In this mode, the outputs assume a high-impedance state, independent of  $\bar{G}/V_{PP}$ .

### program

The programming procedure for the TMS2732A is the same as that for the TMS2532, except that in the program mode,  $\bar{G}/V_{PP}$  is taken from a TTL low level to 21 V.

The program mode consists of the following sequence of events. With the level on  $\bar{G}/V_{PP}$  equal to 21 V, data to be programmed is applied in parallel to output pins Q8-Q1. The location to be programmed is addressed. Once data and addresses are stable, a 10-millisecond TTL low-level pulse is applied to  $\bar{E}$ . The maximum width of this pulse is 11 milliseconds. The programming pulse must be applied at each location that is to be programmed. Locations may be programmed in any order.

Several TMS2732As can be programmed simultaneously by connecting them in parallel and following the programming sequence previously described.

### program verify

After the EPROM has been programmed, the programmed bits should be verified. To verify bit states,  $\bar{G}/V_{PP}$  and  $\bar{E}$  are set to  $V_{IL}$ .

### program inhibit

The program inhibit is useful when programming multiple TMS2732As connected in parallel with different data. Program inhibit can be implemented by applying a high-level signal to  $\bar{E}$  of the device that is not to be programmed.


# TMS2732A

## 32,768-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

### erasure

The TMS2732A is erased by exposing the chip to shortwave ultraviolet light that has a wavelength of 253.7 nanometers (2537 angstroms). The recommended minimum exposure dose (UV intensity  $\times$  exposure time) is fifteen watt-seconds per square centimeter. The lamp should be located about 2.5 centimeters (1 inch) above the chip during erasure. After erasure, all bits are at a high level. It should be noted that normal ambient light contains the correct wavelength for erasure. Therefore, when using the TMS2732A, the window should be covered with an opaque label.

### logic symbol<sup>†</sup>

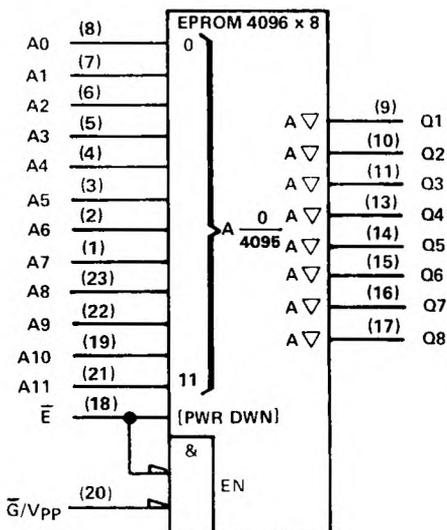

<sup>†</sup>This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

Supply voltage range, $V_{CC}$ .....	-0.3 V to 7 V
Supply voltage range, $V_{PP}$ .....	-0.3 V to 22 V
Input voltage range (except program) .....	-0.3 V to 7 V
Output voltage range .....	-0.3 V to 7 V
Operating free-air temperature range .....	0°C to 70°C
Storage temperature range .....	-65°C to 150°C

<sup>†</sup>Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the "Recommended Operating Conditions" section of this specification is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

# TMS2732A

## 32,768-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

### recommended operating conditions

		MIN	NOM	MAX	UNIT
V <sub>CC</sub>	Supply voltage (see Note 1)	4.75	5	5.25	V
V <sub>pp</sub>	Supply voltage (see Note 2)	V <sub>CC</sub>			V
V <sub>IH</sub>	High-level input voltage	2		V <sub>CC</sub> +1	V
V <sub>IL</sub>	Low-level input voltage	-0.1		0.8	V
T <sub>A</sub>	Operating free-air temperature	0		70	°C

- NOTES: 1. V<sub>CC</sub> must be applied before or at the same time as V<sub>pp</sub> and removed after or at the same time as V<sub>pp</sub>. The device must not be inserted into or removed from the board when V<sub>pp</sub> or V<sub>CC</sub> is applied.
2. V<sub>pp</sub> can be connected to V<sub>CC</sub> directly (except in the program mode). V<sub>CC</sub> supply current in this case would be I<sub>CC</sub> + I<sub>pp</sub>. During programming, V<sub>pp</sub> must be maintained at 21 V (±0.5 V).

### electrical characteristics over full ranges of recommended operating conditions

PARAMETER	TEST CONDITIONS	MIN	MAX	UNIT
V <sub>OH</sub>	High-level output voltage I <sub>OH</sub> = -400 μA	2.4		V
V <sub>OL</sub>	Low-level output voltage I <sub>OL</sub> = 2.1 mA	0.45		V
I <sub>I</sub>	Input current (leakage) V <sub>I</sub> = 0 V to 5.25 V	±10		μA
I <sub>O</sub>	Output current (leakage) V <sub>O</sub> = 0.4 V to 5.25 V	±10		μA
I <sub>CC1</sub>	V <sub>CC</sub> supply current (standby) E at V <sub>IH</sub> , G at V <sub>IL</sub>	30		mA
I <sub>CC2</sub>	V <sub>CC</sub> supply current (active) E and G at V <sub>IL</sub>	125		mA

### capacitance over recommended supply voltage range and operating free-air temperature range, f = 1 MHz †

PARAMETER	TEST CONDITIONS	TYP ‡	MAX	UNIT
C <sub>i</sub>	Input capacitance All except G/V <sub>pp</sub> G/V <sub>pp</sub>	V <sub>I</sub> = 0 V		pF
		4	6	
C <sub>o</sub>	Output capacitance V <sub>O</sub> = 0 V	8	12	pF

† These parameters are tested on sample basis only.

‡ Typical values are at T<sub>A</sub> = 25°C and nominal voltages.

### switching characteristics over recommended supply voltage range and operating free-air temperature range

PARAMETER	TEST CONDITIONS	TMS2732A-17		TMS2732A-20		TMS2732A-25		TMS2732A-45		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
t <sub>g(A)</sub>	Access time from address	170		200		250		450		ns
t <sub>g(E)</sub>	Access time from E	170		200		250		450		ns
t <sub>en(G)</sub>	Output enable time from G	65		70		100		150		ns
t <sub>dis</sub> †	Output disable time from E or G, whichever occurs first	0	60	0	60	0	85	0	130	ns
t <sub>v(A)</sub>	Output data valid time after change of address, E, or G, whichever occurs first	0		0		0		0		ns

NOTE 3: The timing reference levels for inputs and outputs are 0.8 V and 2 V. Input pulse levels are 0.40 V and 2.4 V.

† Value calculated from 0.5 V delta to measured output level. This parameter is only sampled and not 100% tested.

# TMS2732A

## 32,768-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

recommended conditions for programming,  $T_A = 25^\circ\text{C}$  (see Note 4)


		MIN	NOM	MAX	UNIT
$V_{CC}$	Supply voltage	4.5	5	5.25	V
$V_{PP}$	Supply voltage	20.5	21	21.5	V
$V_{IH}$	High-level input voltage	2		$V_{CC} + 1$	V
$V_{IL}$	Low-level input voltage	-0.1		0.8	V
$t_w(\bar{E})$	$\bar{E}$ pulse duration	9	10	11	ms
$t_{su}(A)$	Address setup time	2			$\mu\text{s}$
$t_{su}(D)$	Data setup time	2			$\mu\text{s}$
$t_{su}(V_{PP})$	$V_{PP}$ setup time	2			$\mu\text{s}$
$t_h(A)$	Address hold time	0			$\mu\text{s}$
$t_h(D)$	Data hold time	2			$\mu\text{s}$
$t_h(V_{PP})$	$V_{PP}$ hold time	2			$\mu\text{s}$
$t_{rec}(PG)$	$V_{PP}$ recovery time	2			$\mu\text{s}$
$t_r(PG)G$	$\bar{G}$ rise time during programming	50			ns
$t_{EHD}$	Delay time, data valid after $\bar{E}$ low			1	$\mu\text{s}$

NOTE 4: When programming the TMS2732A, connect a 0.1  $\mu\text{F}$  capacitor between  $V_{PP}$  and GND to suppress spurious voltage transients which may damage the device.

programming characteristics,  $T_A = 25^\circ\text{C}$


PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{IH}$	High-level	2		$V_{CC} + 1$	V
$V_{IL}$	Low-level	-0.1		0.8	V
$V_{OH}$	High-level output voltage (verify)	$I_{OH} = -400 \mu\text{A}$			V
$V_{OL}$	Low-level output voltage (verify)	$I_{OL} = 2.1 \text{ mA}$		0.45	V
$I_I$	Input current (all inputs)	$V_I = V_{IL}$ or $V_{IH}$		10	$\mu\text{A}$
$I_{PP}$	Programming current	$\bar{E} = V_{IL}, \bar{G} = V_{PP}$		50	mA
$I_{CC}$	Supply current			1.5	mA
$t_{dis}(PR)$	Output disable time	0		130	ns

**PARAMETER MEASUREMENT INFORMATION**

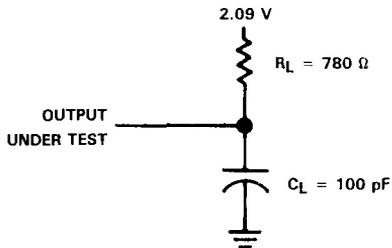


**FIGURE 1. TYPICAL OUTPUT LOAD CIRCUIT**

**read cycle timing**

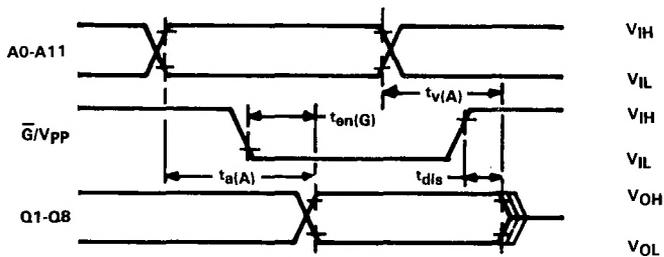


**standby mode**

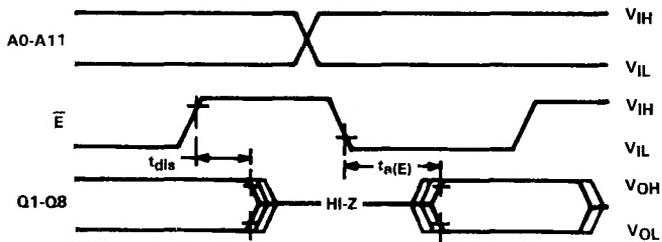

6 EPROMs/PROMs

program cycle timing

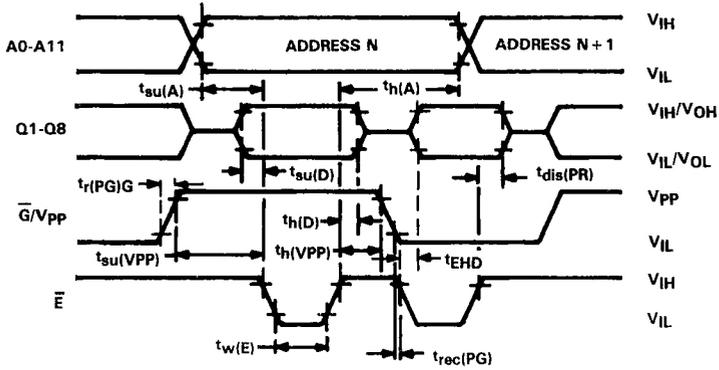

6  
 EPROMs/PROMs




## **EPRoMs/PROMs**

# TMS2764

## 65,536-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

JULY 1983 — REVISED NOVEMBER 1985

- Organization . . . 8192 X 8
- Single 5-V Power Supply
- Pin Compatible with TMS2732A EPROM
- All Inputs and Outputs Are TTL Compatible
- Max Access/Min Cycle Time
  - TMS2764-17 170 ns
  - TMS2764-20 200 ns
  - TMS2764-25 250 ns
  - TMS2764-45 450 ns
- Low Standby Power Dissipation . . .
  - 184 mW (Maximum)
- JEDEC Approved Pinout
- 21-V Power Supply Required for Programming
- Fast Programming Algorithm
- N-Channel Silicon-Gate Technology
- PEP4 Version Available with 168 Hour Burn-in and Guaranteed Operating Temperature Range from -10°C to 85°C (TMS2764-...JP4)

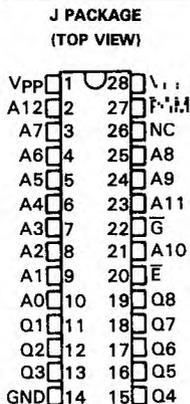

PIN NOMENCLATURE	
AO-A12	Address Inputs
Ē	Chip Enable
Ḡ	Output Enable
GND	Ground
NC	No Connection
PGM	Program
Q1-Q8	Outputs
VCC	5-V Power Supply
VPP	21-V Power Supply

### description

The TMS2764 is an ultraviolet light-erasable, electrically programmable read-only memory. It has 65,536 bits organized as 8,192 words of 8-bit length. The TMS2764-17 only requires a single 5-volt power supply with a tolerance of ±5%, and has a maximum access time of 170 ns. This access time is compatible with high-performance microprocessors.

The TMS2764 provides two output control lines: Output Enable ( $\bar{G}$ ) and Chip Enable ( $\bar{E}$ ). This feature allows the  $\bar{G}$  control line to eliminate bus contention in microprocessor systems. The TMS2764 has a power-down mode that reduces maximum power dissipation from 150 mA to 35 mA when the device is placed on standby.

This EPROM is supplied in a 28-pin, 15.2-mm (600-mil) dual-in-line ceramic package and is designed for operation from 0°C to 70°C.

### operation

The six modes of operation for the TMS2764 are listed in the following table.

PRODUCTION INFORMATION Documents contain information on product status and date. Products conform to specifications unless otherwise indicated. Terms of Texas Instruments standard warranty apply. Production processing does not include testing of all parameters.

6  
EPROMs/PROMs

# TMS2764

## 65,536-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

FUNCTION (PINS)	MODE					
	Read	Output Disable	Power Down (Standby)	Fast Programming	Program Verification	Inhibit Programming
$\bar{E}$ (20)	$V_{IL}$	X	$V_{IH}$	$V_{IL}$	$V_{IL}$	$V_{IH}$
$\bar{G}$	$V_{IL}$	$V_{IH}$	X	$V_{IH}$	$V_{IL}$	X
$\bar{OE}$ (27)	$V_{IH}$	$V_{IH}$	X	$V_{IL}$	$V_{IH}$	X
$V_{PP}$ (1)	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{PP}$	$V_{PP}$	$V_{PP}$ or $V_{CC}$
$V_{CC}$ (28)	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{CC}$
Q1-Q8 (11 to 13, 15 to 19)	Q	HI-Z	HI-Z	D	Q	HI-Z

X =  $V_{IH}$  or  $V_{IL}$

### read

The two control pins ( $\bar{E}$  and  $\bar{G}$ ) must have low-level TTL signals in order to provide data at the outputs. Chip enable ( $\bar{E}$ ) should be used for device selection. Output enable ( $\bar{G}$ ) should be used to gate data to the output pins.

### power down

The power-down mode reduces the maximum active current from 150 mA to 35 mA. A TTL high-level signal applied to  $\bar{E}$  selects the power-down mode. In this mode, the outputs assume a high-impedance state, independent of  $\bar{G}$ .

### erasure

Before programming, the TMS2764 is erased by exposing the chip to shortwave ultraviolet light that has a wavelength of 253.7 nanometers (2537 angstroms). The recommended minimum exposure dose (UV intensity  $\times$  exposure time) is fifteen watt-seconds per square centimeter. A typical 12 mW/cm<sup>2</sup> UV lamp will erase the device in approximately 20 minutes. The lamp should be located about 2.5 centimeters (1 inch) above the chip during erasure. After erasure, all bits are at a high level. It should be noted that normal ambient light contains the correct wavelength for erasure. Therefore, when using the TMS2764, the window should be covered with an opaque label.

### fast programming

Note that the application of a voltage in excess of 22 V to  $V_{pp}$  may damage the TMS2764.


After erasure, logic "0's" are programmed into the desired locations. Programming consists of the following sequence of events. With the level on  $V_{pp}$  equal to 21 V and  $\bar{E}$  at TTL low, data to be programmed is applied in parallel to output pins Q8-Q1. The location to be programmed is addressed. Once data and addresses are stable, a TTL low-level pulse is applied to  $\overline{PGM}$ . Programming pulses must be applied at each location that is to be programmed. Locations may be programmed in any order.

Programming uses two types of programming pulse: Prime and Final. The length of the Prime pulse is 1 millisecond; this pulse is applied X times. After each application the byte being programmed is verified. If the correct data is read, the Final programming pulse is then applied, if correct data is not read, a further 1 millisecond programming pulse is applied up to a maximum X of 15. The Final programming pulse is 4X milliseconds long. This sequence of programming pulses and byte verification is done at  $V_{CC} = 6.0$  V and  $V_{pp} = 21.0$  V. When the full fast programming routine is complete, all bits are verified with  $V_{CC} = V_{pp} = 5$  V. A flowchart of the fast programming routine is shown in Figure 1.



**TMS2764**  
**65,536-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY**

logic symbol†

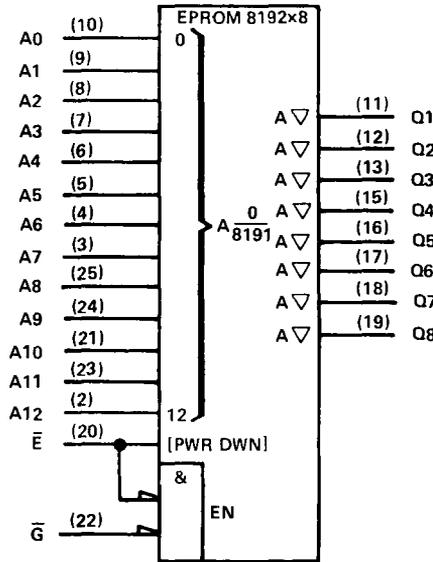

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)‡**

Supply voltage range, $V_{CC}$ .....	-0.6 V to 7 V
Supply voltage range, $V_{PP}$ .....	-0.6 V to 22 V
Input voltage range .....	-0.6 V to 7 V
Output voltage range .....	-0.6 V to 7 V
Operating free-air temperature range .....	0°C to 70°C
Storage temperature range .....	-65°C to 150°C

‡ Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the "Recommended Operating Conditions" section of this specification is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

**recommended operating conditions**

		MIN	NOM	MAX	UNIT
$V_{CC}$	Supply voltage	4.75	5	5.25	V
$V_{PP}$	Supply voltage		$V_{CC}$		V
$V_{IH}$	High-level input voltage	2		$V_{CC} - 1$	V
$V_{IL}$	Low-level input voltage (see Note 1)	-0.1		0.3	V
$T_A$	Operating free-air temperature	0		70	°C

NOTE 1: The algebraic convention, where the more negative (less positive) limit is designated as minimum is used in this data sheet for logic voltage levels only.

**TMS2764**  
**65,536-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY**

**electrical characteristics over full ranges of recommended operating conditions**

PARAMETER		TEST CONDITIONS	MIN	MAX	UNIT
V <sub>OH</sub>	High-level output voltage	I <sub>OH</sub> = -400 μA	2.4		V
V <sub>OL</sub>	Low-level output voltage	I <sub>OL</sub> = 2.1 mA		0.45	V
I <sub>I</sub>	Input current (load)	V <sub>I</sub> = 0 V to 5.25 V		± 10	μA
I <sub>O</sub>	Output current (leakage)	V <sub>O</sub> = 0.4 V to 5.25 V		± 10	μA
I <sub>PP1</sub>	V <sub>PP</sub> supply current (read)	V <sub>PP</sub> = 5.25 V		15	mA
I <sub>PP2</sub>	V <sub>PP</sub> supply current (program)	E and PGM at V <sub>IL</sub>		50	mA
I <sub>CC1</sub>	V <sub>CC</sub> supply current (standby)	E at V <sub>IH</sub>		35	mA
I <sub>CC2</sub>	V <sub>CC</sub> supply current (active)	E and G at V <sub>IL</sub>		150	mA

capacitance over recommended supply voltage range and operating free-air temperature range,  
f = 1 MHz<sup>†</sup>

PARAMETER	TEST CONDITIONS	TYP <sup>‡</sup>	MAX	UNIT
C <sub>i</sub>	Input capacitance V <sub>I</sub> = 0 V	4	6	pF
C <sub>o</sub>	Output capacitance V <sub>O</sub> = 0 V	8	12	pF

<sup>†</sup>Capacitance measurements are made on a sample basis only.

<sup>‡</sup>Typical values are at T<sub>A</sub> = 25°C and nominal voltage.

switching characteristics over recommended supply voltage range and operating free-air temperature range, C<sub>L</sub> = 100 pF, 1 Series 74 TTL load (see Note 2 and Figure 2)

PARAMETER	TMS2764-17		TMS2764-20		TMS2764-25		TMS2764-45		UNIT
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
t <sub>a</sub> (A)	170		200		250		450		ns
t <sub>a</sub> (E)	170		200		250		450		ns
t <sub>en</sub> (G)	65		75		100		150		ns
t <sub>dis</sub> (G) <sup>‡</sup>	0	60	0	60	0	85	0	130	ns
t <sub>v</sub> (A)	0		0		0		0		ns

NOTE 2: For all switching characteristics and timing measurements, input pulse levels are 0.40 V and 2.4 V. Input and output timing reference levels are 0.8 V and 2 V.

<sup>‡</sup>Value calculated from 0.5 volt delta to measured output level; t<sub>dis</sub>(G) is specified from  $\bar{G}$  or  $\bar{E}$ , whichever occurs first. Refer to read cycle timing diagram. This parameter is only sampled and is not 100% tested.

**TMS2764**  
**65,536-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY**

recommended conditions for fast programming routine,  $T_A = 25^\circ\text{C}$  (see Note 2 and fast programming cycle timing diagram)

		MIN	NOM	MAX	UNIT
VCC	Supply voltage (see Note 3)	0.75	0	0.25	V
Vpp	Programming voltage (see Note 4)	2.1	21	21.5	V
t <sub>w</sub> (IPGM)	Initial program pulse duration (see Note 5)	0.3	1	1.0	ms
t <sub>w</sub> (FPGM)	PGM final pulse duration (see Note 6)	3.8		63	ms
t <sub>su</sub> (A)	Address setup time	2			μs
t <sub>su</sub> (D)	Data setup time	2			μs
t <sub>su</sub> (VPP)	VPP setup time	2			μs
t <sub>su</sub> (VCC)	VCC setup time	2			μs
t <sub>h</sub> (A)	Address hold time	0			μs
t <sub>h</sub> (D)	Data hold time	2			μs
t <sub>su</sub> (E)	Enable setup time	2			μs
t <sub>su</sub> (G)	Output enable setup time	2			μs

fast programming characteristics,  $T_A = 25^\circ\text{C}$  (see Note 2 and fast programming cycle timing diagram)


PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t <sub>dis</sub> (G)FP	Output disable time from $\bar{G}$ (see Note 7)	0		130	ns
t <sub>en</sub> (G)FP	Output enable time from $\bar{G}$			150	

- NOTES: 2. For all switching characteristics and timing measurements, input pulse levels are 0.40 V and 2.4 V. Input and output timing reference levels are 0.8 V and 2 V.
3. VCC must be applied simultaneously or before Vpp and removed simultaneously or after Vpp.
4. When programming the TMS2764, connect a 0.1 μF capacitor between Vpp and GND to suppress spurious voltage transients which may damage the device.
5. The Initial program pulse duration tolerance is 1 ms ± 5%.
6. The length of the Final pulse will vary from 3.8 ms to 63 ms depending on the number of Initial pulse applications (X).
7. This parameter is only sampled and is not 100% tested.

6

EPROMs/PROMs


PARAMETER MEASUREMENT INFORMATION

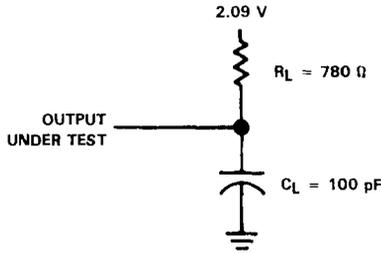

NOTE 8:  $t_f \leq 20$  ns and  $t_r \leq 20$  ns.


FIGURE 2. TYPICAL OUTPUT LOAD CIRCUIT

read cycle timing

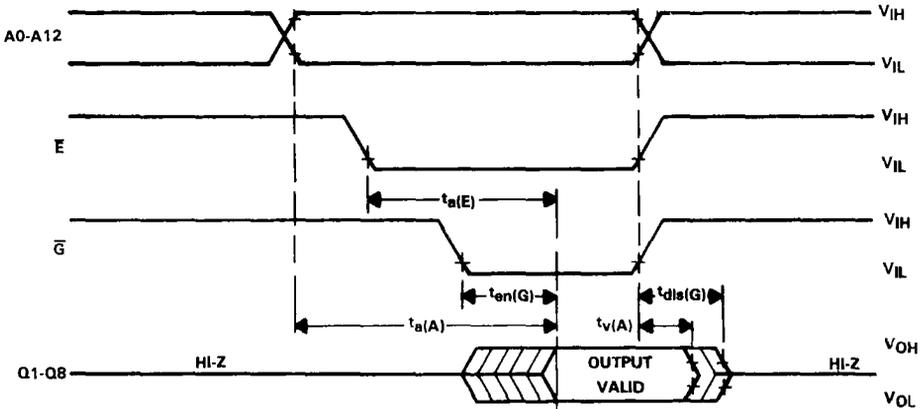

**TMS2764**  
**65,536-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY**

**fast program cycle timing**

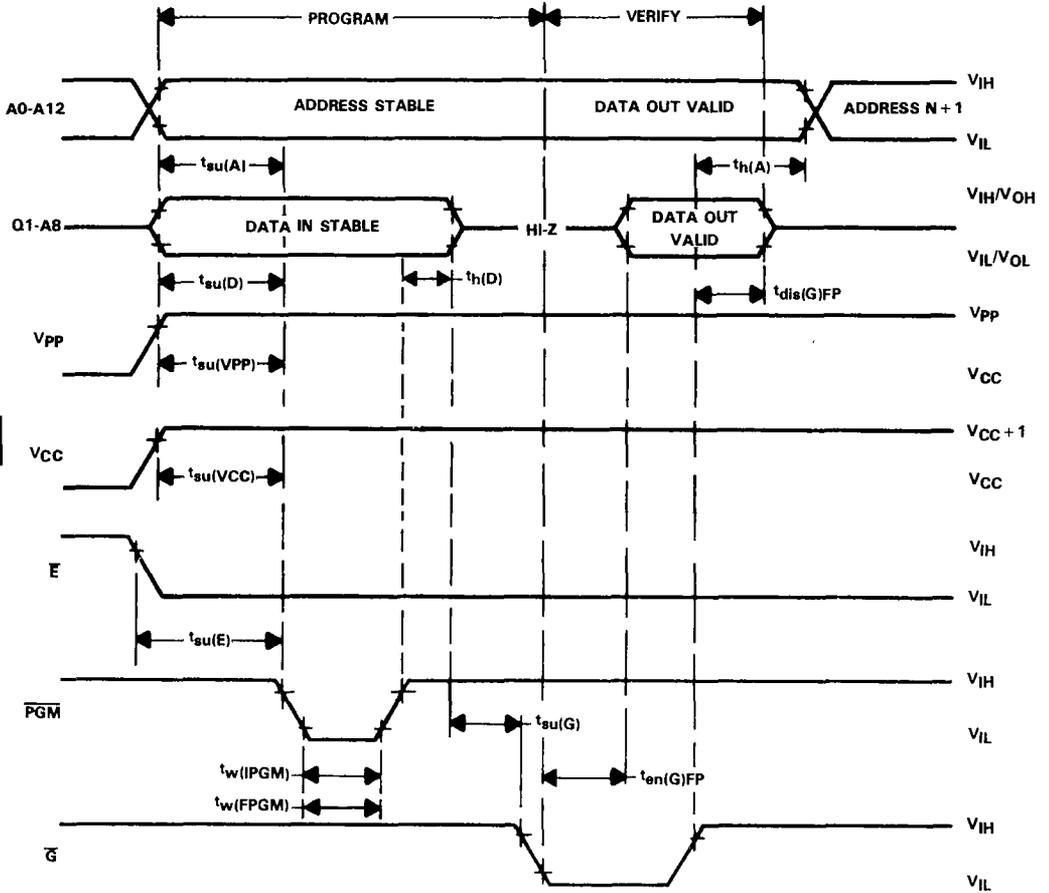

6 EPROMs/PROMS

## ERASABLE PROGRAMMABLE READ-ONLY MEMORY

### ENHANCED PERFORMANCE EPROMS — PEP4

- 168 hr  $\pm$  8 hr Burn-in at 125°C
- Tested to 0.1% AQL
- Extended Temperature Range

Texas Instruments offers extended temperature range EPROMs which provide an enhanced degree of reliability.

The PEP4 designation signifies:

- Devices Subjected to Electrical Testing over a Temperature Range Exceeding Commercial Requirements.
- All Devices Have Received a 168 hr  $\pm$  8 hr 125°C Burn-in with a PDA of 2%.

This combination results in an improved quality and reliability level for those applications which deem it necessary. The user benefits from improved long term cost realized through reduced system down-time.

#### PEP4 PRODUCT FAMILY

DEVICE	ORGANIZATION	MAXIMUM ACCESS TIME (ns)	V <sub>CC</sub> SUPPLY VOLTAGE (V)		OPERATING TEMPERATURE RANGE (°C)
			MIN	MAX	
TMS2732A-__JP4	4096 X 8	250	4.5	5.5	-10 to 85
		450	4.5	5.5	-10 to 85
TMS2764-__JP4	8192 X 8	250	4.5	5.5	-10 to 85
		450	4.5	5.5	-10 to 85

#### ELECTRICAL CHARACTERISTICS


PEP4 EPROM devices meet or exceed all the electrical and timing parameters specified in the standard data sheet with the following exceptions.

PARAMETER		TMS2732A-__JP4 MAX	TMS2764-__JP4 MAX	UNIT
I <sub>CC1</sub>	V <sub>CC</sub> supply current (standby)	35	40	mA
I <sub>CC2</sub>	V <sub>CC</sub> supply current (active)	15		mA



- Organization . . . 8K × 8
- Single 5-V Power Supply
- Pin Compatible with Existing 64K EPROMs and TMS2732A
- All Inputs/Outputs Fully TTL Compatible
- Max Access/Min Cycle Time
 

'27C64-1,	'27C64-15	150 ns
'27C64-2,	'27C64-20	200 ns
'27C64,	'27C64-25	250 ns
'27C64-3,	'27C64-30	300 ns
'27C64-4,	'27C64-45	450 ns
- HVC MOS Technology
- 3-State Output Buffers
- 400 mV Guaranteed DC Noise Immunity with Standard TTL Loads
- Low Power Dissipation ( $V_{CC} = 5.25\text{ V}$ )
  - Active . . . 210 mW Worst Case
  - Standby . . . 1.4 mW Worst Case (CMOS-Input Levels)

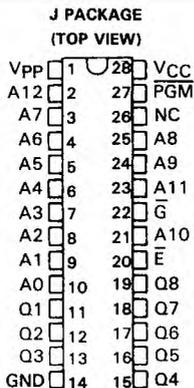

PIN NOMENCLATURE	
A0-A12	Address Inputs
$\bar{E}$	Chip Enable/Power Down
$\bar{G}$	Output Enable
GND	Ground
NC	No Connection
PGM	Program
Q1-Q8	Outputs
VCC	5-V Power Supply
Vpp	12.5-V Power Supply

**description**

The TMS27C64 series are 65,536-bit, ultraviolet-light erasable, electrically programmable read-only memories. These devices are fabricated using HVC MOS technology for high speed and simple interface with MOS and bipolar circuits. All inputs (including program data inputs) can be driven by Series 74 TTL circuits without the use of external pull-up resistors, and each output can drive one Series 74 TTL circuit without external resistors. The data outputs are three-state for connecting multiple devices to a common bus. The TMS27C64 is pin compatible with existing 28-pin ROMs and EPROMs. It is offered in a dual-inline ceramic package (J suffix) rated for operation from 0°C to 70°C.

Since these EPROMs operate from a single 5-V supply (in the read mode), they are ideal for use in microprocessor-based systems. One other (12.5 V) supply is needed for programming, but all programming signals are TTL level. For programming outside the system, existing EPROM programmers can be used. Locations may be programmed singly, in blocks, or at random.

**operation**

There are seven modes of operation for the TMS27C64 listed on the following page. Read mode requires a single 5-V supply. All inputs are TTL level except for Vpp during programming (12.5 V) and 12 V on A9 for signature mode.

**6  
EPROMs/PROMs**

ADVANCE INFORMATION: All documents contain information on new products in the sampling or preproduction phase of development. Characteristic data and other specifications are subject to change without notice.



# TMS27C64

## 65,536-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

FUNCTION (PINS)	MODE							
	Read	Output Disable	Standby	Programming	Verify	Program Inhibit	Signature Mode	
$\bar{E}$ (20)	$V_{IL}$	$V_{IL}$	$V_{IH}$	$V_{IL}$	$V_{IL}$	$V_{IH}$	$V_{IL}$	
$\bar{G}$ (22)	$V_{IL}$	$V_{IH}$	$X^\dagger$	$V_{IH}$	$V_{IL}$	X	$V_{IL}$	
PGM (27)	$V_{IH}$	$V_{IH}$	X	$V_{IL}$	$V_{IH}$	X	$V_{IH}$	
VPP (1)	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{PP}$	$V_{PP}$	$V_{PP}$	$V_{CC}$	
VCC (28)	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{CC}$	
A9 (24)	X	X	X	X	X	X	$V_H^\ddagger$   $V_H^\ddagger$	
A0 (10)	X	X	X	X	X	X	$V_{IL}$   $V_{IH}$	
Q1-Q8 (11-13, 15-19)	D <sub>OUT</sub>	HI-Z	HI-Z	D <sub>IN</sub>	D <sub>OUT</sub>	HI-Z	CODE	
							MFG	DEVICE
							97	07

$^\dagger X$  can be  $V_{IL}$  or  $V_{IH}$ .  
 $^\ddagger V_H = 12 V \pm 0.5 V$ .

9

EPROMs/PROMS

### read/output disable

When the outputs of two or more TMS27C64's are connected in parallel on the same bus, the output of any particular device in the circuit can be read with no interference from the competing outputs of the other devices. To read the output of the TMS27C64, a low-level signal is applied to the  $\bar{E}$  and  $\bar{G}$  pins. All other devices in the circuit should have their outputs disabled by applying a high-level signal to one of these pins. Output data is accessed at pins Q1 to Q8.

### power down

Active I<sub>CC</sub> current can be reduced from 40 mA to 500  $\mu A$  (TTL-level inputs) or 250  $\mu A$  (CMOS-level inputs) by applying a high TTL signal to the  $\bar{E}$  pin. In this mode all outputs are in the high-impedance state.

### erasure

Before programming, the TMS27C64 is erased by exposing the chip through the transparent lid to high intensity ultraviolet light (wavelength 2537 angstroms). The recommended minimum exposure dose (UV intensity  $\times$  exposure time) is fifteen watt-seconds per square centimeter. A typical 12 milliwatt per square centimeter, filterless UV lamp will erase the device in 21 minutes. The lamp should be located about 2.5 centimeters above the chip during erasure. After erasure, all bits are in the high state. It should be noted that normal ambient light contains the correct wavelength for erasure. Therefore, when using the TMS27C64, the window should be covered with an opaque label.

### fast programming

After erasure (all bits in logic '1' state), logic '0's are programmed into the desired locations. A programmed '0' can only be erased by ultraviolet light. Data is presented in parallel (eight bits) on pins Q1 to Q8. Once addresses and data are stable,  $\bar{G}$  is pulsed. The programming mode is achieved when  $V_{PP} = 12.5 V$ ,  $V_{IH} = V_{IL}$ ,  $V_{CC} = 6.0 V$ ,  $\bar{G} = V_{IH}$ , and  $\bar{E} = V_{IL}$ . More than one TMS27C64 can be programmed when the devices are connected in parallel. Locations can be programmed in any order.

Programming uses two types of programming pulses: Prime and Final. The length of the Prime pulse is 1 millisecond; this pulse is applied X times. After each Prime pulse, the byte being programmed is verified. If the correct data is read, the Final programming pulse is applied; if correct data is not read, an additional 1 millisecond pulse is applied up to a maximum X of 25. The Final programming pulse is 3X long. This sequence of programming and verification is performed at  $V_{CC} = 6.0\text{ V}$  and  $V_{PP} = 12.5\text{ V}$ . When the full fast programming routine is complete, all bits are verified with  $V_{CC} = V_{PP} = 5\text{ V}$  (see Figure 1).

**program inhibit**

Programming may be inhibited by maintaining a high level input on the  $\bar{E}$  pin or  $\overline{\text{PGM}}$  pin.

**program verify**

Programmed bits may be verified with  $V_{PP} = 12.5\text{ V}$  when  $\bar{G} = V_{IL}$ ,  $\bar{E} = V_{IL}$  and  $\overline{\text{PGM}} = V_{IH}$ .

**signature mode**

The signature mode provides access to a binary code identifying the manufacturer and type. This mode is activated when A9 (pin 24) is forced to  $12\text{ V} \pm 0.5\text{ V}$ . Two identifier bytes are accessed by A0 (pin 10) i.e., A0 =  $V_{IL}$  - manufacturer; A0 =  $V_{IH}$  - device. All other addresses must be held at  $V_{IL}$ . Each byte possesses odd parity on bit Q8. The manufacturer code for this device is 97, and the device code is 07.

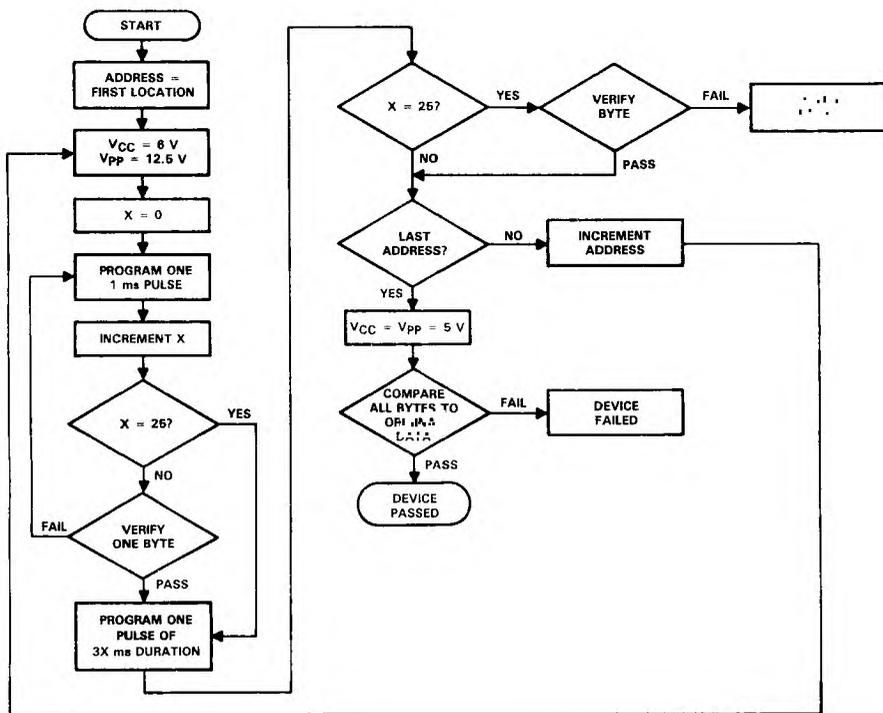


FIGURE 1. FAST PROGRAMMING FLOWCHART



# TMS27C64

## 65,536-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

### recommended operating conditions

		TMS27C64-1 TMS27C64-2 TMS27C64 TMS27C64-3 TMS27C64-4			TMS27C64-15 TMS27C64-20 TMS27C64-25 TMS27C64-30 TMS27C64-45			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V <sub>CC</sub>	Supply voltage (see Note 2)	4.5	5	5.25	4.5	5	5.5	V
V <sub>PP</sub>	Supply voltage (see Note 3)	V <sub>CC</sub>			V <sub>CC</sub>			V
V <sub>IH</sub>	High-level input voltage	TTL	2	V <sub>CC</sub> +1	2	V <sub>CC</sub> +1		V
		CMOS	V <sub>CC</sub> -0.2	V <sub>CC</sub> +0.2	V <sub>CC</sub> -0.2	V <sub>CC</sub> +0.2		V
V <sub>IL</sub>	Low-level input voltage	TTL	-0.5	0.8	-0.5	0.8		V
		CMOS	GND-0.2	GND+0.2	GND-0.2	GND+0.2		V
T <sub>A</sub>	Operating free-air temperature	0		70	0		70	°C

- NOTES: 2. V<sub>CC</sub> must be applied before or at the same time as V<sub>PP</sub> and removed after or at the same time as V<sub>PP</sub>. The device must not be inserted into or removed from the board when V<sub>PP</sub> or V<sub>CC</sub> is applied.
3. V<sub>PP</sub> can be connected to V<sub>CC</sub> directly (except in the program mode). V<sub>CC</sub> supply current in this case would be I<sub>CC</sub> + I<sub>PP</sub>. During programming, V<sub>PP</sub> must be maintained at 12.5 V (±0.5 V).

### electrical characteristics over full ranges of recommended operating conditions

PARAMETER		TEST CONDITIONS	MIN	TYP†	MAX	UNIT
V <sub>OH</sub>	High-level output voltage	I <sub>OH</sub> = -400 μA	2.4			V
V <sub>OL</sub>	Low-level output voltage	I <sub>OL</sub> = 2.1 mA			0.4	V
I <sub>I</sub>	Input current (leakage)	V <sub>I</sub> = 0 V to 5.5 V			±10	μA
I <sub>O</sub>	Output current (leakage)	V <sub>O</sub> = 0 V to V <sub>CC</sub>			±10	μA
I <sub>PP1</sub>	V <sub>PP</sub> supply current	V <sub>PP</sub> = V <sub>CC</sub> = 5.5 V			100	μA
I <sub>PP2</sub>	V <sub>PP</sub> supply current (during program pulse)	V <sub>PP</sub> = 13 V	30		50	mA
I <sub>CC1</sub>	V <sub>CC</sub> supply current (standby)	TTL-input level	V <sub>CC</sub> = 5.5 V, $\bar{E}$ = V <sub>IH</sub>		500	μA
		CMOS-input level	V <sub>CC</sub> = 5.5 V, $\bar{E}$ = V <sub>CC</sub>		250	μA
I <sub>CC2</sub>	V <sub>CC</sub> supply current (active)	V <sub>CC</sub> = 5.5 V, $\bar{E}$ = V <sub>IL</sub> , t <sub>cycle</sub> = minimum cycle time, outputs open	30		40	mA

†Typical values are at T<sub>A</sub> = 25°C and nominal voltages.

### capacitance over recommended supply voltage range and operating free-air temperature range, f ≈ 1 MHz†

PARAMETER		TEST CONDITIONS	MIN	TYP‡	MAX	UNIT
C <sub>i</sub>	Input capacitance	V <sub>I</sub> = 0 V, f = 1 MHz	6		9	pF
C <sub>o</sub>	Output capacitance	V <sub>O</sub> = 0 V, f = 1 MHz	8		12	pF

†Capacitance measurements are made on sample basis only.

‡Typical values are at T<sub>A</sub> = 25°C and nominal voltages.

6  
EPROMs/PROMs

# TMS27C64

## 65,536-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

switching characteristics over full ranges of recommended operating conditions (see Note 4)

PARAMETER	TEST CONDITIONS (SEE NOTES 4 AND 5)	'27C64-1		'27C64-2		'27C64		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
$t_{a(A)}$ Access time from address	$C_L = 100$ pF, 1 Series 74 TTL Load, Input $t_r \leq 20$ ns, Input $t_f \leq 20$ ns	150		200		250		ns
$t_{a(E)}$ Access time from chip enable		150						ns
$t_{en(G)}$ Output enable time from $\overline{G}$		75		75		100		ns
$t_{dis}$ Output disable time from $\overline{G}$ or $\overline{E}$ , whichever occurs first <sup>†</sup>		0 60		0 60		0 60		ns
$t_{v(A)}$ Output data valid time after change of address, $\overline{E}$ , or $\overline{G}$ , whichever occurs first <sup>†</sup>		0		0		0		ns

PARAMETER	TEST CONDITIONS (SEE NOTES 4 AND 5)	'27C64-3		'27C64-4		UNIT
		MIN	MAX	MIN	MAX	
$t_{a(A)}$ Access time from address	$C_L = 100$ pF, 1 Series 74 TTL Load, Input $t_r \leq 20$ ns, Input $t_f \leq 20$ ns	300		450		ns
$t_{a(E)}$ Access time from chip enable		300		450		ns
$t_{en(G)}$ Output enable time from $\overline{G}$		120		150		ns
$t_{dis}$ Output disable time from $\overline{G}$ or $\overline{E}$ , whichever occurs first <sup>†</sup>		0 105		0 130		ns
$t_{v(A)}$ Output data valid time after change of address, $\overline{E}$ , or $\overline{G}$ , whichever occurs first <sup>†</sup>		0		0		ns

<sup>†</sup>Value calculated from 0.5 V delta to measured output level. This parameter is only sampled and not 100% tested.


recommended timing requirements for programming,  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 6$  V,  $V_{pp} = 12.5$  V (see Note 4)

		MIN	NOM	MAX	UNIT
$t_w(\text{IPGM})$	Initial program pulse duration	0.95	1	1.05	ms
$t_w(\text{FPGM})$	Final pulse duration	2.85		78.75	ms
$t_{su(A)}$	Address setup time	2			$\mu\text{s}$
$t_{su(E)}$	$\overline{E}$ setup time	2			$\mu\text{s}$
$t_{su(G)}$	$\overline{G}$ setup time	2			$\mu\text{s}$
$t_{dis(G)}$	Output disable time from $\overline{G}$	0		130	ns
$t_{en(G)}$	Output enable time from $\overline{G}$			150	ns
$t_{su(D)}$	Data setup time	2			$\mu\text{s}$
$t_{su(V_{pp})}$	$V_{pp}$ setup time	2			$\mu\text{s}$
$t_{su(V_{CC})}$	$V_{CC}$ setup time	2			$\mu\text{s}$
$t_h(A)$	Address hold time	0			$\mu\text{s}$
$t_h(D)$	Data hold time	2			$\mu\text{s}$

NOTES: 4. For all switching characteristics and timing measurements, input pulse levels are 0.40 V to 2.4 V and  $V_{pp} = 12.5$  V  $\pm$  0.5 V during programming.


5. Common test conditions apply for  $t_{dis(G)}$  except during programming.

**PARAMETER MEASUREMENT INFORMATION**

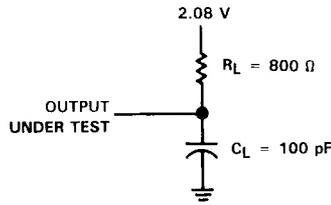

**FIGURE 2. OUTPUT LOAD CIRCUIT**


**read cycle timing**

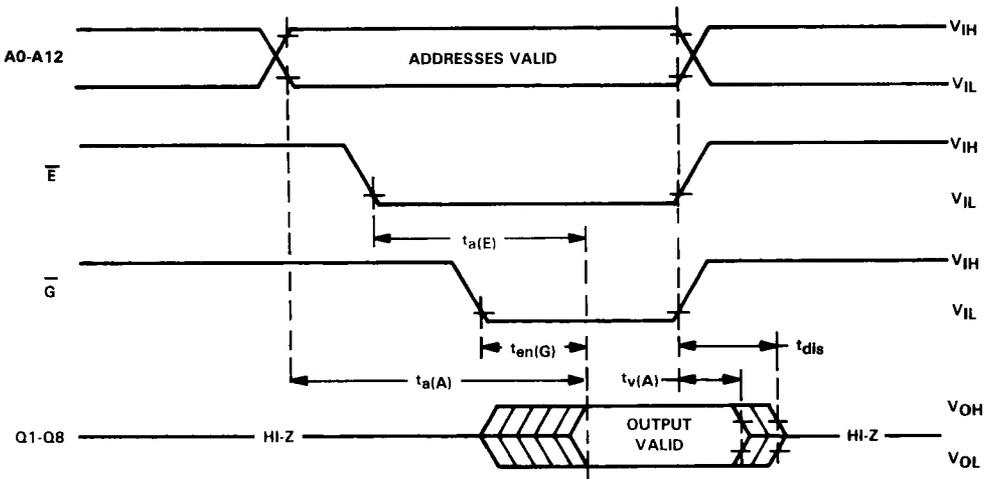

**6**  
**EPROMs/PROMs**

**TMS27C64**  
**65,536-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY**

**program cycle timing**

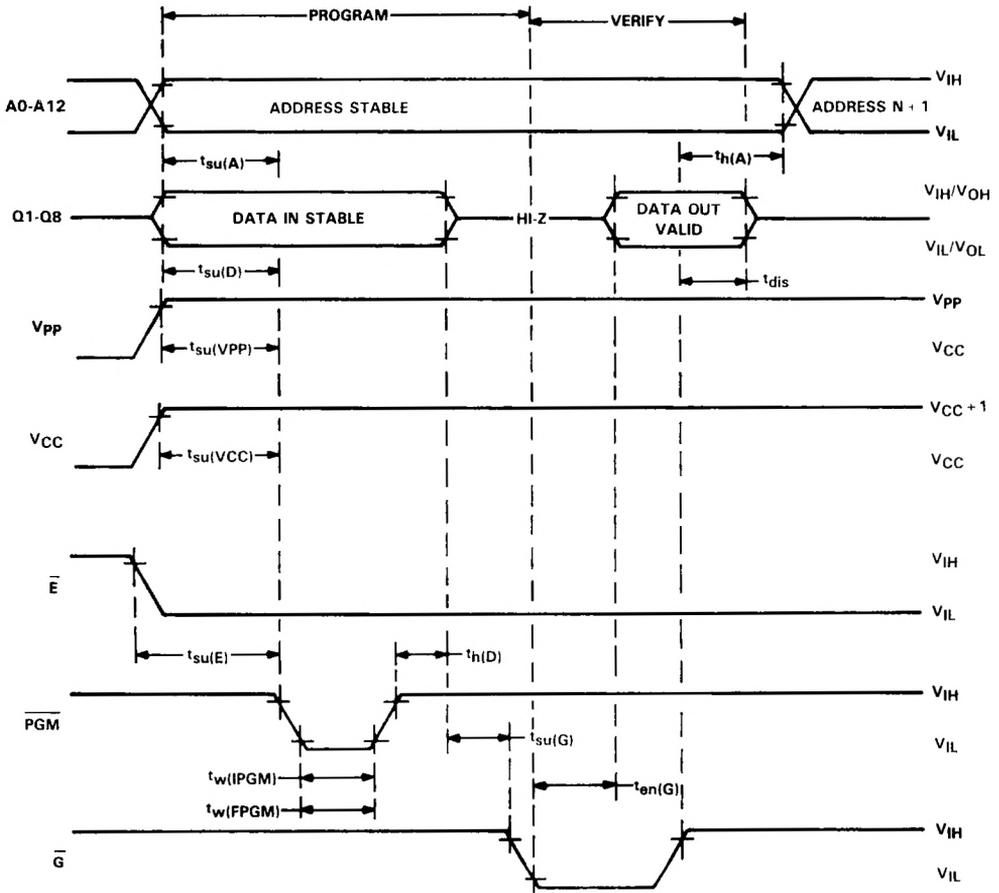

EPROMs/PROMs


# TMS27C128

## 131,072-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

OCTOBER 1984 — REVISED NOVEMBER 1985

- Organization . . . 16K × 8
- Single 5-V Power Supply
- Pin Compatible with Existing 64K and 128K EPROMs
- All Inputs/Outputs Fully TTL Compatible
- Max Access/Min Cycle Time
 

'27C128-1,	'27C128-15	150 ns
'27C128-2,	'27C128-20	200 ns
'27C128,	'27C128-25	250 ns
'27C128-3,	'27C128-30	300 ns
'27C128-4,	'27C128-45	450 ns
- HVCMOS Technology
- 3-State Output Buffers
- 400 mV Guaranteed DC Noise Immunity with Standard TTL Loads
- Low Power Dissipation ( $V_{CC} = 5.25\text{ V}$ )
  - Active . . . 210 mW Worst Case
  - Standby . . . 1.4 mW Worst Case (CMOS-Input Levels)

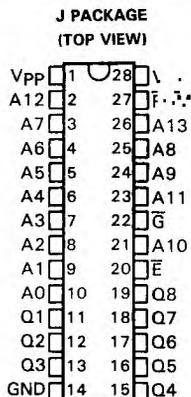

PIN NOMENCLATURE	
A0-A13	Address Inputs
E	Chip Enable/Power Down
G	Output Enable
GND	Ground
PGM	Program
Q1-Q8	Outputs
VCC	5-V Power Supply
Vpp	12.5-V Power Supply

### description

The TMS27C128 series are 131,072-bit, ultraviolet-light erasable, electrically programmable read-only memories. These devices are fabricated using HVCMOS technology for high speed and simple interface with MOS and bipolar circuits. All inputs (including program data inputs) can be driven by Series 74 TTL circuits without the use of external pull-up resistors, and each output can drive one Series 74 TTL circuit without external resistors. The data outputs are three state for connecting multiple devices to a common bus. The TMS27C128 is pin compatible with existing 28-pin ROMs and EPROMs. It is offered in a dual-inline ceramic package (J suffix) rated for operation from 0°C to 70°C.

Since these EPROMs operate from a single 5-V supply (in the read mode), they are ideal for use in microprocessor-based systems. One other (12.5 V) supply is needed for programming, but all programming signals are TTL level. For programming outside the system, existing EPROM programmers can be used. Locations may be programmed singly, in blocks, or at random.

### operation

There are seven modes of operation for the TMS27C128 listed on the following page. Read mode requires a single 5-V supply. All inputs are TTL level except for Vpp during programming (12.5 V) and 12 V on A9 for signature mode.

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 1443 • HOUSTON, TEXAS 77001

Copyright © 1985, Texas Instruments Incorporated

# TMS27C128

## 131,072-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

FUNCTION (PINS)	MODE											
	Read	Output Disable	Standby	Programming	Verify	Program Inhibit	Signature Mode					
$\bar{E}$ (20)	$V_{IL}$	$V_{IL}$	$V_{IH}$	$V_{IL}$	$V_{IL}$	$V_{IH}$	$V_{IL}$					
$\bar{G}$ (22)	$V_{IL}$	$V_{IH}$	$X^\dagger$	$V_{IH}$	$V_{IL}$	X	$V_{IL}$					
PGM (27)	$V_{IH}$	$V_{IH}$	X	$V_{IL}$	$V_{IH}$	X	$V_{IL}$					
$V_{PP}$ (1)	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{PP}$	$V_{PP}$	$V_{PP}$	$V_{CC}$					
$V_{CC}$ (28)	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{CC}$					
A9 (24)	X	X	X	X	X	X	$V_H^\ddagger$	$V_H^\ddagger$				
A0 (10)	X	X	X	X	X	X	$V_{IL}$	$V_{IH}$				
Q1-Q8 (11-13, 15-19)	D <sub>OUT</sub>	HI-Z	HI-Z	D <sub>IN</sub>	D <sub>OUT</sub>	HI-Z	<table border="1"> <tr> <td colspan="2">MFG DEVICE</td> </tr> <tr> <td>97</td> <td>83</td> </tr> </table>		MFG DEVICE		97	83
MFG DEVICE												
97	83											

$^\dagger X$  can be  $V_{IL}$  or  $V_{IH}$ .  
 $^\ddagger V_H = 12\text{ V} \pm 0.5\text{ V}$ .

### read/output disable

When the outputs of two or more TMS27C128's are connected in parallel on the same bus, the output of any particular device in the circuit can be read with no interference from the competing outputs of the other devices. To read the output of the TMS27C128, a low-level signal is applied to the  $\bar{E}$  and  $\bar{G}$  pins. All other devices in the circuit should have their outputs disabled by applying a high-level signal to one of these pins. Output data is accessed at pins Q1 to Q8.

### power down

Active I<sub>CC</sub> current can be reduced from 40 mA to 500  $\mu\text{A}$  (TTL-level inputs) or 250  $\mu\text{A}$  (CMOS-level inputs) by applying a high TTL signal to the  $\bar{E}$  pin. In this mode all outputs are in the high-impedance state.

### erasure

Before programming, the TMS27C128 is erased by exposing the chip through the transparent lid to high intensity ultraviolet light (wavelength 2537 angstroms). The recommended minimum exposure dose (UV intensity  $\times$  exposure time) is fifteen watt-seconds per square centimeter. A typical 12 milliwatt per square centimeter, filterless UV lamp will erase the device in 21 minutes. The lamp should be located about 2.5 centimeters above the chip during erasure. After erasure, all bits are in the high state. It should be noted that normal ambient light contains the correct wavelength for erasure. Therefore, when using the TMS27C128, the window should be covered with an opaque label.

### fast programming

After erasure (all bits are in logic '1' state), logic '0's are programmed into the desired locations. A programmed '0' can only be erased by ultraviolet light. Data is presented in parallel (eight bits) on pins Q1 to Q8. Once addresses and data are stable,  $\bar{P}$ GM is pulsed. The programming mode is achieved when  $V_{PP} = 12.5\text{ V}$ ,  $\bar{E} = V_{IL}$ ,  $V_{CC} = 6.0\text{ V}$ ,  $\bar{G} = V_{IH}$ , and  $\bar{E} = V_{IL}$ . More than one TMS27C128 can be programmed when the devices are connected in parallel. Locations can be programmed in any order.

Programming uses two types of programming pulses: Prime and Final. The length of the Prime pulse is 1 millisecond; this pulse is applied X times. After each Prime pulse, the byte being programmed is verified. If the correct data is read, the Final programming pulse is applied; if correct data is not read, an additional 1 millisecond pulse is applied up to a maximum X of 25. The Final programming pulse is 3X long. This sequence of programming and verification is performed at  $V_{CC} = 6.0\text{ V}$  and  $V_{pp} = 12.5\text{ V}$ . When the full fast programming routine is complete, all bits are verified with  $V_{CC} = V_{pp} = 5\text{ V}$  (see Figure 1).

**program inhibit**


Programming may be inhibited by maintaining a high level input on the  $\bar{E}$  pin or  $\overline{\text{PGM}}$  pin.

**program verify**

Programmed bits may be verified with  $V_{pp} = 12.5\text{ V}$  when  $\bar{G} = V_{IL}$ ,  $\bar{E} = V_{IL}$ , and  $\overline{\text{PGM}} = V_{IH}$ .

**signature mode**

The signature mode provides access to a binary code identifying the manufacturer and type. This mode is activated when A9 (pin 24) is forced to  $12\text{ V} \pm 0.5\text{ V}$ . Two identifier bytes are accessed by A0 (pin 10) i.e.,  $A0 = V_{IL}$  - manufacturer;  $A0 = V_{IH}$  - device. All other addresses must be held at  $V_{IL}$ . Each byte possesses odd parity on bit Q8. The manufacturer code for this device is 97, and the device code is 83.

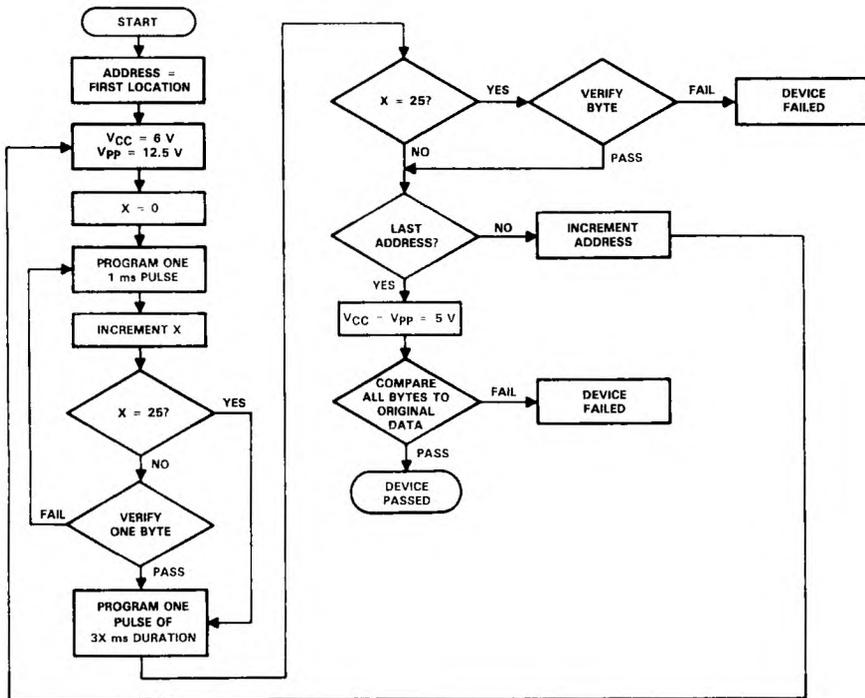

**FIGURE 1. FAST PROGRAMMING FLOWCHART**

6  
 EPROMs/PROMs



# TMS27C128

## 131,072-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

### recommended operating conditions

		TMS27C128-1 TMS27C128-2 TMS27C128 TMS27C128-3 TMS27C128-4			TMS27C128-15 TMS27C128-20 TMS27C128-25 TMS27C128-30 TMS27C128-45			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V <sub>CC</sub>	Supply voltage (see Note 2)	4.75	5	5.25	4.5	5	5.5	V
V <sub>PP</sub>	Supply voltage (see Note 3)	V <sub>CC</sub>			V <sub>CC</sub>			V
V <sub>IH</sub>	High-level input voltage	TTL	2	V <sub>CC</sub> +1	2	V <sub>CC</sub> +1		V
		CMOS	V <sub>CC</sub> -0.2	V <sub>CC</sub> +0.2	V <sub>CC</sub> -0.2	V <sub>CC</sub> +0.2		V
V <sub>IL</sub>	Low-level input voltage	TTL	-0.5	0.8	-0.5	0.8		V
		CMOS	GND-0.2	GND+0.2	GND-0.2	GND+0.2		V
T <sub>A</sub>	Operating free-air temperature	0			70			°C

- NOTES: 2. V<sub>CC</sub> must be applied before or at the same time as V<sub>PP</sub> and removed after or at the same time as V<sub>PP</sub>. The device must not be inserted into or removed from the board when V<sub>PP</sub> or V<sub>CC</sub> is applied.
3. V<sub>PP</sub> can be connected to V<sub>CC</sub> directly (except in the program mode). V<sub>CC</sub> supply current in this case would be I<sub>CC</sub>+I<sub>PP</sub>. During programming, V<sub>PP</sub> must be maintained at 12.5 V (±0.5V).

### electrical characteristics over full ranges of recommended operating conditions

PARAMETER		TEST CONDITIONS	MIN	TYP <sup>†</sup>	MAX	UNIT	
V <sub>OH</sub>	High-level output voltage	I <sub>OH</sub> = -400 μA	2.4			V	
V <sub>OL</sub>	Low-level output voltage	I <sub>OL</sub> = 2.1 mA	0.4			V	
I <sub>I</sub>	Input current (leakage)	V <sub>I</sub> = 0 V to 5.5 V	±10			μA	
I <sub>O</sub>	Output current (leakage)	V <sub>O</sub> = 0 V to V <sub>CC</sub>	±10			μA	
I <sub>PP1</sub>	V <sub>PP</sub> supply current	V <sub>PP</sub> = V <sub>CC</sub> = 5.5 V	100			μA	
I <sub>PP2</sub>	V <sub>PP</sub> supply current (during program pulse)	V <sub>PP</sub> = 13 V	30 50			mA	
I <sub>CC1</sub>	V <sub>CC</sub> supply current (standby)	TTL-input level	V <sub>CC</sub> = 5.5 V, $\bar{E}$ = V <sub>IH</sub>			500	μA
		CMOS-input level	V <sub>CC</sub> = 5.5 V, $\bar{E}$ = V <sub>CC</sub>			250	μA
I <sub>CC2</sub>	V <sub>CC</sub> supply current (active)	V <sub>CC</sub> = 5.5 V, $\bar{E}$ = V <sub>IL</sub> , t <sub>cycle</sub> = minimum cycle time, outputs open	30 40			mA	

<sup>†</sup>Typical values are at T<sub>A</sub> = 25°C and nominal voltages.

### capacitance over recommended supply voltage range and operating free-air temperature range, f = 1 MHz<sup>†</sup>

PARAMETER		TEST CONDITIONS	MIN	TYP <sup>†</sup>	MAX	UNIT
C <sub>i</sub>	Input capacitance	V <sub>I</sub> = 0 V, f = 1 MHz	6 9			pF
C <sub>o</sub>	Output capacitance	V <sub>O</sub> = 0 V, f = 1 MHz	8 12			pF

<sup>†</sup>Capacitance measurements are made on sample basis only.

<sup>‡</sup>Typical values are at T<sub>A</sub> = 25°C and nominal voltages.

# TMS27C128

## 131,072-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

switching characteristics over full ranges of recommended operating conditions (see Note 4)

PARAMETER	TEST CONDITIONS (SEE NOTES 4 AND 5)	'27C128-1 '27C128-15		'27C128-2 '27C128-20		'27C128 '27C128-25		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
$t_{a(A)}$ Access time from address	$C_L = 100$ pF, 1 Series 74 TTL Load, Input $t_r \leq 20$ ns, Input $t_f \leq 20$ ns	150				250		ns
$t_{a(E)}$ Access time from chip enable		150		200		250		ns
$t_{en(G)}$ Output enable time from $\overline{G}$		75		75		100		ns
$t_{dis}$ Output disable time from $\overline{G}$ or $\overline{E}$ , whichever occurs first <sup>†</sup>		0	60	0	60	0	60	ns
$t_{v(A)}$ Output data valid time after change of address, $\overline{E}$ , or $\overline{G}$ , whichever occurs first <sup>†</sup>		0		0		0		ns

PARAMETER	TEST CONDITIONS (SEE NOTES 4 AND 5)	'27C128-3 '27C128-30		'27C128-4 '27C128-45		UNIT
		MIN	MAX	MIN	MAX	
$t_{a(A)}$ Access time from address	$C_L = 100$ pF, 1 Series 74 TTL Load, Input $t_r \leq 20$ ns, Input $t_f \leq 20$ ns	300		450		ns
$t_{a(E)}$ Access time from chip enable		300		450		ns
$t_{en(G)}$ Output enable time from $\overline{G}$		120		150		ns
$t_{dis}$ Output disable time from $\overline{G}$ or $\overline{E}$ , whichever occurs first <sup>†</sup>		0	105	0	130	ns
$t_{v(A)}$ Output data valid time after change of address, $\overline{E}$ , or $\overline{G}$ , whichever occurs first <sup>†</sup>		0		0		ns

<sup>†</sup>Value calculated from 0.5 V delta to measured output level. This parameter is only sampled and not 100% tested.


recommended timing requirements for programming,  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 6$  V,  $V_{pp} = 12.5$  V (see Note 4)

		MIN	NOM	MAX	UNIT
$t_w(\text{IPGM})$	Initial program pulse duration	0.95	1	1.05	ms
$t_w(\text{FPGM})$	Final pulse duration	2.85		78.75	ms
$t_{su(A)}$	Address setup time	2			$\mu\text{s}$
$t_{su(E)}$	$\overline{E}$ setup time	2			$\mu\text{s}$
$t_{su(G)}$	$\overline{G}$ setup time	2			$\mu\text{s}$
$t_{dis(G)}$	Output disable time from $\overline{G}$	0		130	ns
$t_{en(G)}$	Output enable time from $\overline{G}$			150	ns
$t_{su(D)}$	Data setup time	2			$\mu\text{s}$
$t_{su(VPP)}$	$V_{pp}$ setup time	2			$\mu\text{s}$
$t_{su(VCC)}$	$V_{CC}$ setup time	2			$\mu\text{s}$
$t_h(A)$	Address hold time	0			$\mu\text{s}$
$t_h(D)$	Data hold time	2			$\mu\text{s}$

NOTES: 4. For all switching characteristics and timing measurements, input pulse levels are 0.40 V to 2.4 V and  $V_{pp} = 12.5$  V  $\pm$  0.5 V during programming.


5. Common test conditions apply for  $t_{dis(G)}$  except during programming.

**PARAMETER MEASUREMENT INFORMATION**

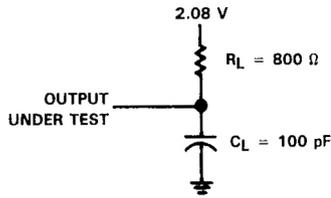


**FIGURE 2. OUTPUT LOAD CIRCUIT**

**read cycle timing**

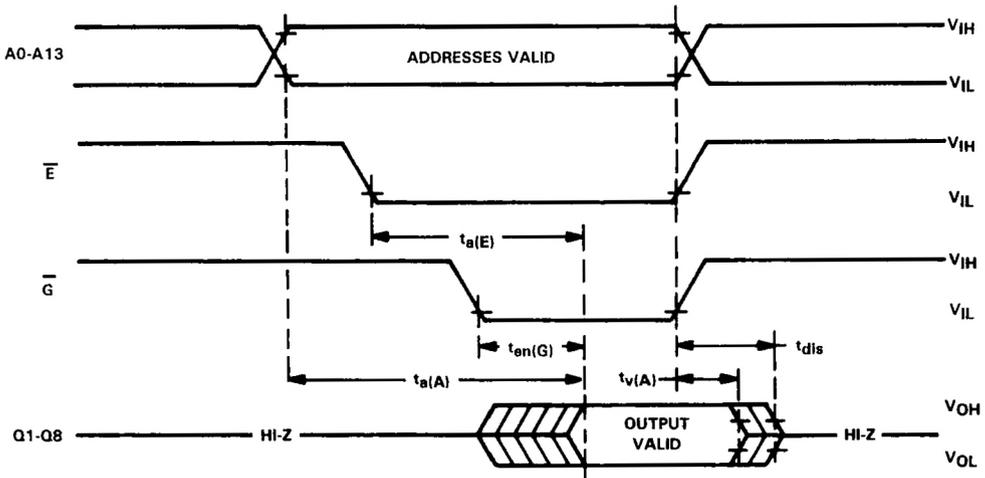

**TMS27C128**  
**131,072-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY**

**program cycle timing**

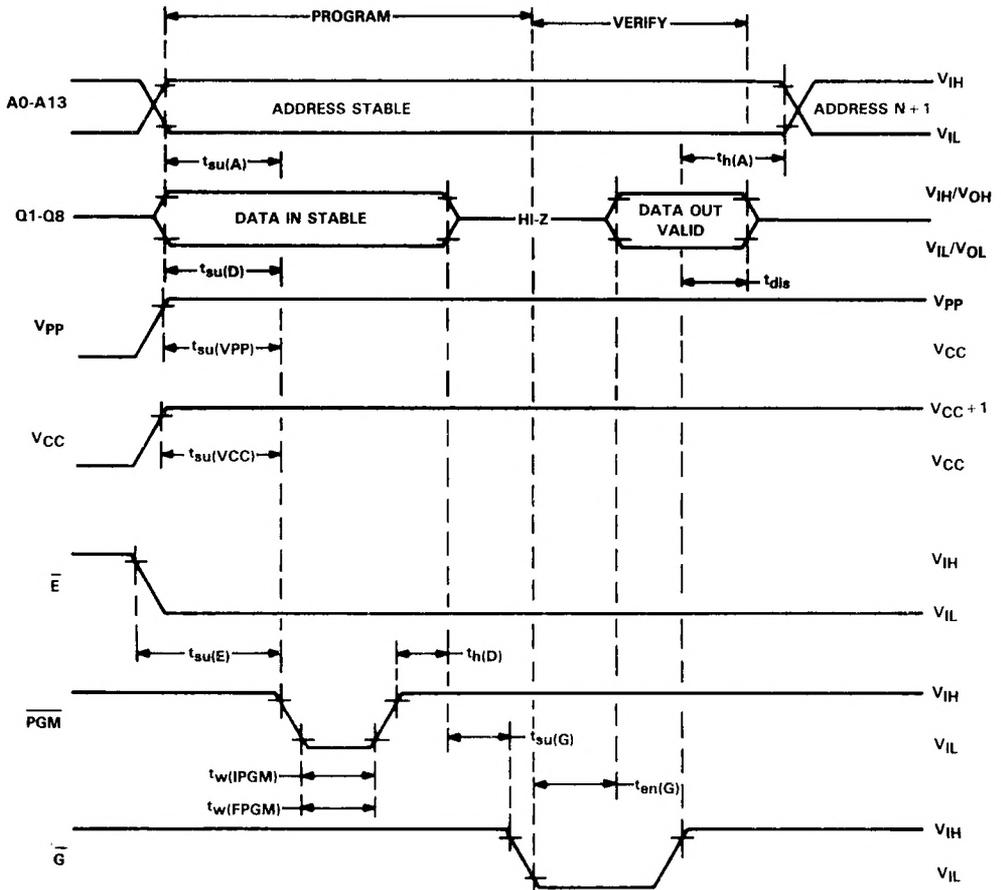

6  
 EPROMs/PROMs


# TMS27C256

## 262,144-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

SEPTEMBER 1984 — REVISED NOVEMBER 1985

- Organization . . . 32K × 8
- Single 5-V Power Supply
- Pin Compatible with Existing 128K and 256K EPROMs
- All Inputs/Outputs Fully TTL Compatible
- Max Access/Min Cycle Time
 

'27C256-1, '27C256-17	170 ns
'27C256-2, '27C256-20	200 ns
'27C256, '27C256-25	250 ns
'27C256-3, '27C256-30	300 ns
'27C256-4, '27C256-45	450 ns
- HVCMOS Technology
- 3-State Output Buffers
- 400 mV Guaranteed DC Noise Immunity with Standard TTL Loads
- Low Power Dissipation ( $V_{CC} = 5.25\text{ V}$ )
  - Active . . . 210 mW Worst Case
  - Standby . . . 1.4 mW Worst Case (CMOS-Input Levels)

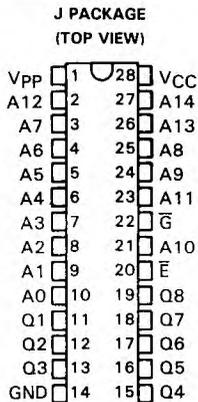

PIN NOMENCLATURE	
A0-A14	Address Inputs
$\bar{E}$	Chip Enable/Power Down
$\bar{G}$	Output Enable
GND	Ground
Q1-Q8	Outputs
$V_{CC}$	5-V Power Supply
$V_{pp}$	12.5-V Power Supply

### description

The TMS27C256 series are 262,144-bit, ultraviolet-light erasable, electrically programmable read-only memories. These devices are fabricated using HVCMOS technology for high speed and simple interface with MOS and bipolar circuits. All inputs (including program data inputs) can be driven by Series 74 TTL circuits without the use of external pull-up resistors, and each output can drive one Series 74 TTL circuit without external resistors. The data outputs are three state for connecting multiple devices to a common bus. The TMS27C256 is pin compatible with existing 28-pin ROMs and EPROMs. It is offered in a dual-inline ceramic package (J suffix) rated for operation from 0°C to 70°C.

Since these EPROMs operate from a single 5-V supply (in the read mode), they are ideal for use in microprocessor-based systems. One other (12.5 V) supply is needed for programming, but all programming signals are TTL level. For programming outside the system, existing EPROM programmers can be used. Locations may be programmed singly, in blocks, or at random.

### operation

There are seven modes of operation for the TMS27C256 listed on the following page. Read mode requires a single 5-V supply. All inputs are TTL level except for  $V_{pp}$  during programming (12.5 V) and 12 V on A9 for signature mode.

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 1443 • HOUSTON, TEXAS 77001

Copyright © 1985, Texas Instruments Incorporated

6  
EPROMs/PROMs

# TMS27C256

## 262,144-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

FUNCTION (PINS)	MODE							Signature Mode	
	Read	Output Disable	Standby	Programming	Verify	Program Inhibit			
$\bar{E}$ (20)	V <sub>IL</sub>	V <sub>IL</sub>	V <sub>IH</sub>	V <sub>IL</sub>	V <sub>IH</sub>	V <sub>IH</sub>			
$\bar{G}$ (22)	V <sub>IL</sub>	V <sub>IH</sub>	X <sup>†</sup>	V <sub>IH</sub>	V <sub>IL</sub>	V <sub>IH</sub>			
V <sub>PP</sub> (1)	V <sub>CC</sub>	V <sub>CC</sub>	V <sub>CC</sub>	V <sub>PP</sub>	V <sub>PP</sub>	V <sub>PP</sub>			
V <sub>CC</sub> (28)	V <sub>CC</sub>	V <sub>CC</sub>	V <sub>CC</sub>	V <sub>CC</sub>	V <sub>CC</sub>	V <sub>CC</sub>			
A <sub>9</sub> (24)	X	X	X	X	X	X	V <sub>H</sub> <sup>‡</sup>	V <sub>H</sub> <sup>‡</sup>	
A <sub>0</sub> (10)	X	X	X	X	X	X	V <sub>IL</sub>	V <sub>IH</sub>	
Q1-Q8 (11-13, 15-19)	D <sub>OUT</sub>	HI-Z	HI-Z	D <sub>IN</sub>	D <sub>OUT</sub>	HI-Z	MFG	DEVICE	
							97	04	

<sup>†</sup>X can be V<sub>IL</sub> or V<sub>IH</sub>.

<sup>‡</sup>V<sub>H</sub> = 12 V ± 0.5 V.

### read/output disable

When the outputs of two or more TMS27C256's are connected in parallel on the same bus, the output of any particular device in the circuit can be read with no interference from the competing outputs of the other devices. To read the output of the TMS27C256, a low-level signal is applied to the  $\bar{E}$  and  $\bar{G}$  pins. All other devices in the circuit should have their outputs disabled by applying a high-level signal to one of these pins. Output data is accessed at pins Q1 to Q8.

### power down

Active I<sub>CC</sub> current can be reduced from 40 mA to 500  $\mu$ A (TTL-level inputs) or 250  $\mu$ A (CMOS-level inputs) by applying a high TTL signal to the  $\bar{E}$  pin. In this mode all outputs are in the high-impedance state.

### erasure

Before programming, the TMS27C256 is erased by exposing the chip through the transparent lid to high intensity ultraviolet light (wavelength 2537 angstroms). The recommended minimum exposure dose (UV intensity  $\times$  exposure time) is fifteen watt-seconds per square centimeter. A typical 12 milliwatt per square centimeter, filterless UV lamp will erase the device in 21 minutes. The lamp should be located about 2.5 centimeters above the chip during erasure. After erasure, all bits are in the high state. It should be noted that normal ambient light contains the correct wavelength for erasure. Therefore, when using the TMS27C256, the window should be covered with an opaque label.

### fast programming

After erasure (all bits in logic '1' state), logic '0's are programmed into the desired locations. A programmed '0' can only be erased by ultraviolet light. Data is presented in parallel (eight bits) on pins Q1 to Q8. Once addresses and data are stable,  $\bar{E}$  is pulsed. The programming mode is achieved when V<sub>pp</sub> = 12.5 V, V<sub>CC</sub> = 6.0 V,  $\bar{G}$  = V<sub>IH</sub>, and  $\bar{E}$  = V<sub>IL</sub>. More than one TMS27C256 can be programmed when the devices are connected in parallel. Locations can be programmed in any order.

Programming uses two types of programming pulses: Prime and Final. The length of the Prime pulse is 1 millisecond; this pulse is applied X times. After each Prime pulse, the byte being programmed is verified. If the correct data is read, the Final programming pulse is applied; if correct data is not read, an additional

1 millisecond pulse is applied up to a maximum X of 25. The Final programming pulse is 3X long. This sequence of programming and verification is performed at  $V_{CC} = 6.0\text{ V}$  and  $V_{pp} = 12.5\text{ V}$ . When the full fast programming routine is complete, all bits are verified with  $V_{CC} = V_{pp} = 5\text{ V}$  (see Figure 1).

**program inhibit**


Programming may be inhibited by maintaining a high level input on the  $\bar{E}$  pin.

**program verify**

Programmed bits may be verified with  $V_{pp} = 12.5\text{ V}$  when  $\bar{G} = V_{IL}$ , and  $\bar{E} = V_{IH}$ .

**signature mode**

The signature mode provides access to a binary code identifying the manufacturer and type. This mode is activated when A9 (pin 24) is forced to  $12\text{ V} \pm 0.5\text{ V}$ . Two identifier bytes are accessed by A0 (pin 10) i.e.,  $A0 = V_{IL}$  - manufacturer;  $A0 = V_{IH}$  - device. All other addresses must be held at  $V_{IL}$ . Each byte possesses odd parity on bit Q8. The manufacturer code for this device is 97, and the device code is 04.

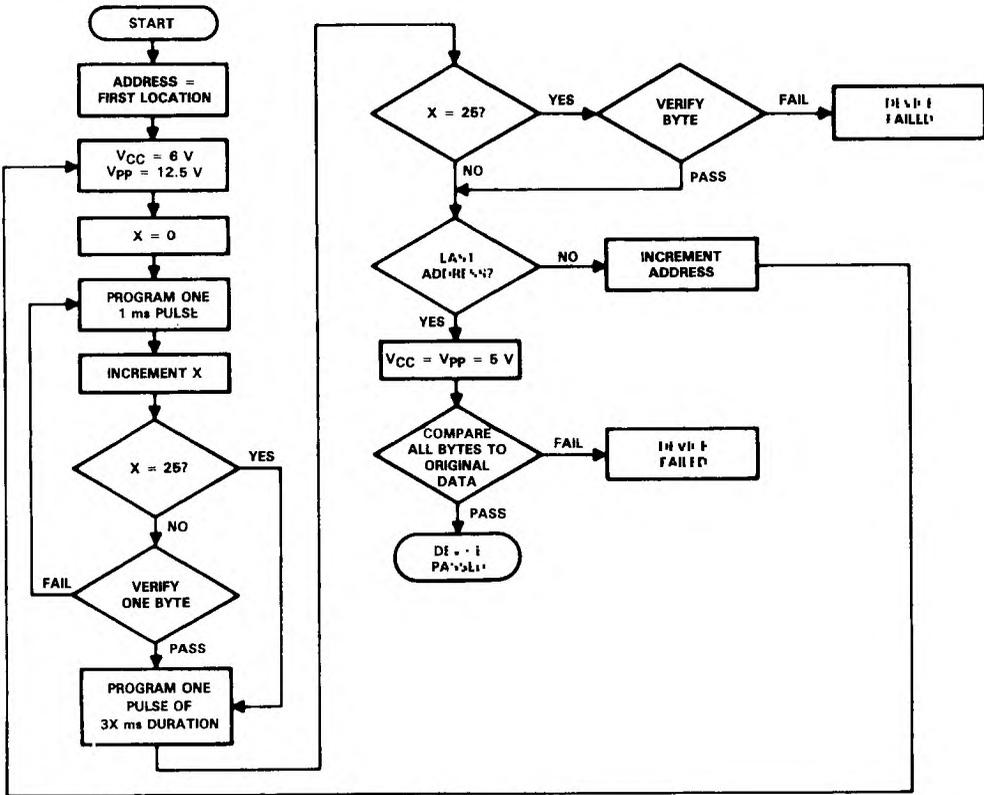

**FIGURE 1. FAST PROGRAMMING FLOWCHART**

**6**  
**EPROMs/PROMs**



# TMS27C256

## 262,144-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

### recommended operating conditions

		TMS27C256-1 TMS27C256-2 TMS27C256 TMS27C256-3 TMS27C256-4			TMS27C256-17 TMS27C256-20 TMS27C256-25 TMS27C256-30 TMS27C256-45			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V <sub>CC</sub>	Supply voltage (see Note 2)	4.75	5	5.25	4.5	5	5.5	V
V <sub>PP</sub>	Supply voltage (see Note 3)	V <sub>CC</sub>			V <sub>CC</sub>			V
V <sub>IH</sub>	High-level input voltage	TTL	2	V <sub>CC</sub> +1	2	V <sub>CC</sub> +1		V
		CMOS	V <sub>CC</sub> -0.2	V <sub>CC</sub> +0.2	V <sub>CC</sub> -0.2	V <sub>CC</sub> +0.2		V
V <sub>IL</sub>	Low-level input voltage	TTL	-0.5	0.8	-0.5	0.8		V
		CMOS	GND-0.2	GND+0.2	GND-0.2	GND+0.2		V
T <sub>A</sub>	Operating free-air temperature	0		70	0		70	°C

- NOTES: 2. V<sub>CC</sub> must be applied before or at the same time as V<sub>PP</sub> and removed after or at the same time as V<sub>PP</sub>. The device must not be inserted into or removed from the board when V<sub>PP</sub> or V<sub>CC</sub> is applied.
3. V<sub>PP</sub> can be connected to V<sub>CC</sub> directly (except in the program mode). V<sub>CC</sub> supply current in this case would be I<sub>CC</sub>+I<sub>PP</sub>. During programming, V<sub>PP</sub> must be maintained at 12.5 V (±0.5 V).

### electrical characteristics over full ranges of recommended operating conditions

PARAMETER		TEST CONDITIONS	MIN	TYP†	MAX	UNIT
V <sub>OH</sub>	High-level output voltage	I <sub>OH</sub> = -400 μA	2.4			V
V <sub>OL</sub>	Low-level output voltage	I <sub>OL</sub> = 2.1 mA			0.4	V
I <sub>I</sub>	Input current (leakage)	V <sub>I</sub> = 0 V to 5.5 V			±10	μA
I <sub>O</sub>	Output current (leakage)	V <sub>O</sub> = 0 V to V <sub>CC</sub>			±10	μA
I <sub>PP1</sub>	V <sub>PP</sub> supply current	V <sub>PP</sub> = V <sub>CC</sub> = 5.5 V			100	μA
I <sub>PP2</sub>	V <sub>PP</sub> supply current (during program pulse)	V <sub>PP</sub> = 13 V	35		50	mA
I <sub>CC1</sub>	V <sub>CC</sub> supply current (standby)	TTL-input level	V <sub>CC</sub> = 5.5 V, $\bar{E}$ = V <sub>IH</sub>		500	μA
		CMOS-input level	V <sub>CC</sub> = 5.5 V, $\bar{E}$ = V <sub>CC</sub>		250	μA
I <sub>CC2</sub>	V <sub>CC</sub> supply current (active)	V <sub>CC</sub> = 5.5 V, $\bar{E}$ = V <sub>IL</sub> , t <sub>cycle</sub> = minimum cycle time, outputs open	30		40	mA

†Typical values are at T<sub>A</sub> = 25°C and nominal voltages.

# TMS27C256

## 262,144-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY

capacitance over recommended supply voltage range and operating free-air temperature range,  $f = 1 \text{ MHz}^\dagger$

PARAMETER		TEST CONDITIONS	MIN	TYP <sup>‡</sup>	MAX	UNIT
$C_i$	Input capacitance	$V_i = 0 \text{ V}, f = 1 \text{ MHz}$		6	9	pF
$C_o$	Output capacitance	$V_o = 0 \text{ V}, f = 1 \text{ MHz}$		8	12	pF

<sup>†</sup>Capacitance measurements are made on sample basis only.

<sup>‡</sup>Typical values are at  $T_A = 25^\circ\text{C}$  and nominal voltages.

switching characteristics over full ranges of recommended operating conditions (see Note 4)

PARAMETER	TEST CONDITIONS (SEE NOTES 4 AND 5)	'27C256-1		'27C256-2		'27C256		UNIT
		'27C256-17		'27C256-20		'27C256-25		
		MIN	MAX	MIN	MAX	MIN	MAX	
$t_a(A)$	Access time from address	170		200		250		ns
$t_a(E)$	Access time from chip enable	170		200		250		ns
$t_{en}(G)$	Output enable time from $\overline{G}$	75		75		100		ns
$t_{dis}$	Output disable time from $\overline{G}$ or $\overline{E}$ , whichever occurs first <sup>†</sup>	0	60	0	60	0	60	ns
$t_{V(A)}$	Output data valid time after change of address, $\overline{E}$ , or $\overline{G}$ , whichever occurs first <sup>†</sup>	0		0		0		ns

$C_L = 100 \text{ pF}$ ,  
1 Series 74 TTL Load,  
Input  $t_r \leq 20 \text{ ns}$ ,  
Input  $t_f \leq 20 \text{ ns}$

PARAMETER	TEST CONDITIONS (SEE NOTES 4 AND 5)	'27C256-3		'27C256-4		UNIT
		'27C256-30		'27C256-45		
		MIN	MAX	MIN	MAX	
$t_a(A)$	Access time from address	300		450		ns
$t_a(E)$	Access time from chip enable	300		450		ns
$t_{en}(G)$	Output enable time from $\overline{G}$	120		150		ns
$t_{dis}$	Output disable time from $\overline{G}$ or $\overline{E}$ , whichever occurs first <sup>†</sup>	0	105	0	130	ns
$t_{V(A)}$	Output data valid time after change of address, $\overline{E}$ , or $\overline{G}$ , whichever occurs first <sup>†</sup>	0		0		ns

$C_L = 100 \text{ pF}$ ,  
1 Series 74 TTL Load,  
Input  $t_r \leq 20 \text{ ns}$ ,  
Input  $t_f \leq 20 \text{ ns}$

<sup>†</sup>Value calculated from 0.5 V delta to measured output level. This parameter is only sampled and not 100% tested.

6


EPROMs/PROMs

recommended timing requirements for programming,  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 6\text{ V}$ ,  $V_{pp} = 12.5\text{ V}$   
 (see Note 4)

		MIN	NOM	MAX	UNIT
$t_w(\text{IPGM})$	Initial program pulse duration	0.95	1	1.05	ms
$t_w(\text{FPGM})$	Final pulse duration	2.85		78.75	ms
$t_{su}(\text{A})$	Address setup time		2		$\mu\text{s}$
$t_{su}(\text{G})$	$\overline{\text{G}}$ setup time		2		$\mu\text{s}$
$t_{dis}(\text{G})$	Output disable time from $\overline{\text{G}}$	0		130	ns
$t_{en}(\text{G})$	Output enable time from $\overline{\text{G}}$			150	ns
$t_{su}(\text{D})$	Data setup time		2		$\mu\text{s}$
$t_{su}(\text{VPP})$	$V_{pp}$ setup time		2		$\mu\text{s}$
$t_{su}(\text{VCC})$	$V_{CC}$ setup time		2		$\mu\text{s}$
$t_h(\text{A})$	Address hold time		0		$\mu\text{s}$
$t_h(\text{D})$	Data hold time		2		$\mu\text{s}$

- NOTES: 4. For all switching characteristics and timing measurements, input pulse levels are 0.40 V to 2.4 V and  $V_{pp} = 12.5\text{ V} \pm 0.5\text{ V}$  during programming.  
 5. Common test conditions apply for  $t_{dis}(\text{G})$  except during programming.


**PARAMETER MEASUREMENT INFORMATION**

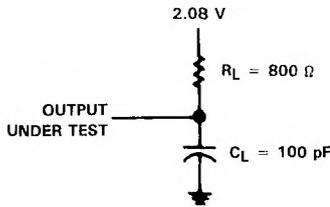


**FIGURE 2. OUTPUT LOAD CIRCUIT**

**TMS27C256**  
**262,144-BIT ERASABLE PROGRAMMABLE READ-ONLY MEMORY**

read cycle timing

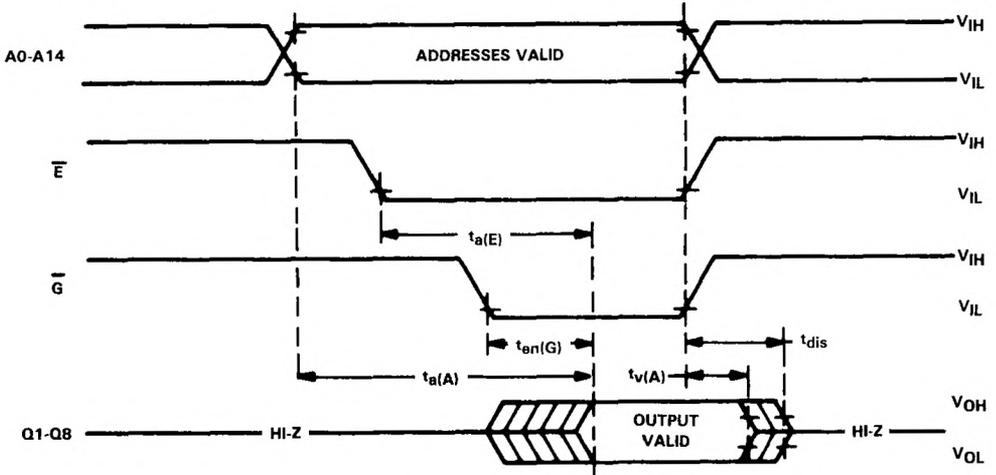


program cycle timing

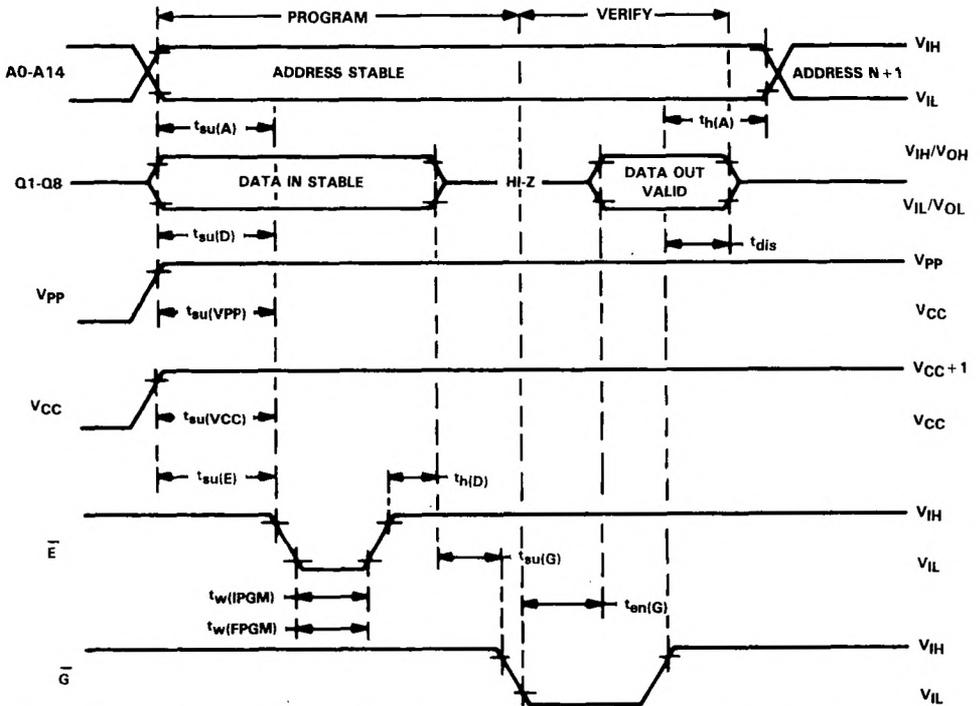

- Organization . . . 64K × 8
- Single 5-V Power Supply
- Pin Compatible with Existing 512K EPROMs
- All Inputs/Outputs Fully TTL Compatible
- Max Access/Min Cycle Time
 

'27C512-2,	'27C512-20	200 ns
'27C512,	'27C512-25	250 ns
'27C512-3,	'27C512-30	300 ns
'27C512-4,	'27C512-45	450 ns
- HVC MOS Technology
- 3-State Output Buffers
- 400 mV Guaranteed DC Noise Immunity with Standard TTL Loads
- Low Power Dissipation ( $V_{CC} = 5.25\text{ V}$ )
  - Active . . . 263 mW Worst Case
  - Standby . . . 1.4 mW Worst Case (CMOS-Input Levels)

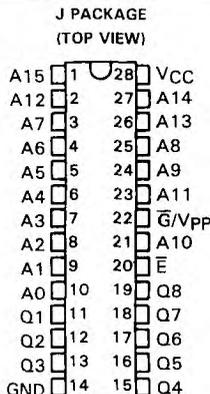

PIN NOMENCLATURE	
A0-A15	Address Inputs
$\bar{E}$	Chip Enable/Power Down
GND	Ground
Q1-Q8	Outputs
$V_{CC}$	5-V Power Supply
$\bar{G}/V_{pp}$	12.5-V Power Supply/ Output Enable

**description**

The TMX27C512 series are 524,288-bit, ultraviolet-light erasable, electrically programmable read-only memories. These devices are fabricated using HVC MOS technology for high speed and simple interface with MOS and bipolar circuits. All inputs (including program data inputs) can be driven by Series 74 TTL circuits without the use of external pull-up resistors, and each output can drive one Series 74 TTL circuit without external resistors. The data outputs are three state for connecting multiple devices to a common bus. The TMX27C512 is pin compatible with existing 28-pin ROMs and EPROMs. It is offered in a dual-in-line ceramic package (J suffix) rated for operation from 0°C to 70°C.

Since these EPROMs operate from a single 5-V supply (in the read mode), they are ideal for use in microprocessor-based systems. One other (12.5 V) supply is needed for programming, but all programming signals are TTL level. For programming outside the system, existing EPROM programmers can be used. Locations may be programmed singly, in blocks, or at random.




PRELIMINARY PREVIEW documents contain information on products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.



- Organization . . . 4096 X 8
- Single 5-V Power Supply
- All Inputs and Outputs Are TTL Compatible
- Max Access/Min Cycle Time  
TMS27P32A-25 250 ns  
TMS27P32A-30 300 ns  
TMS27P32A-45 450 ns
- Low Standby Power Dissipation . . .  
158 mW (Maximum)
- JEDEC Approved Pinout . . . Industry Standard
- 21-V Power Supply Required for Programming
- N-Channel Silicon-Gate Technology

**N PACKAGE  
(TOP VIEW)**

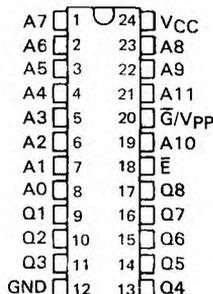

**description**

The TMS27P32A is a one-time, electrically programmable read-only memory. It has 32,768 bits organized as 4,096 words of 8-bit length. The TMS27P32A only requires a single 5-volt power supply with a tolerance of  $\pm 5\%$ .

The TMS27P32A provides two output control lines: Output Enable ( $\bar{G}$ ) and Chip Enable ( $\bar{E}$ ). This feature allows the  $\bar{G}$  control line to eliminate bus contention in multibus microprocessor systems. The TMS27P32A has a power-down mode that reduces maximum power dissipation from 657 mW to 158 mW when the device is placed on standby.

This PROM is supplied in a 24-pin dual-in-line plastic package and is designed for operation from 0°C to 70°C.

**operation**

The six modes of operation for the TMS27P32A are listed in the following table.

FUNCTION (PINS)	MODE					
	Read	Deselect	Power Down (Standby)	Program	Program Verification	Inhibit Programming
$\bar{E}$ (18)	V <sub>IL</sub>	X	V <sub>IH</sub>	V <sub>IL</sub>	V <sub>IL</sub>	V <sub>IH</sub>
$\bar{G}/V_{PP}$ (20)	V <sub>IL</sub>	V <sub>IH</sub>	X	21 V	V <sub>IL</sub>	21 V
V <sub>CC</sub> (24)	5 V	5 V	5 V	5 V	5 V	5 V
Q1-Q8 (9 to 11, 13 to 17)	Q	HI-Z	HI-Z	D	Q	HI-Z

X = V<sub>IH</sub> or V<sub>IL</sub>

PIN NOMENCLATURE	
A0-A11	Address Inputs
$\bar{E}$	Chip Enable
$\bar{G}/V_{PP}$	Output Enable/21 V
GND	Ground
Q1-Q8	Outputs
V <sub>CC</sub>	5-V Power Supply

**6  
EPROMs/PROMs**

# TMS27P32A

## 32,768-BIT PROGRAMMABLE READ-ONLY MEMORY

---

### read

The two control pins ( $\bar{E}$  and  $\bar{G}/V_{pp}$ ) must have low-level TTL signals in order to provide data at the outputs. Chip enable ( $\bar{E}$ ) should be used for device selection. Output enable ( $\bar{G}/V_{pp}$ ) should be used to gate data to the output pins.

### power down

The power-down mode reduces the maximum power dissipation from 657 mW to 158 mW. A TTL high-level signal applied to  $\bar{E}$  selects the power-down mode. In this mode, the outputs assume a high-impedance state, independent of  $\bar{G}/V_{pp}$ .

### program

The programming procedure for the TMS27P32A is the same as that for the TMS2732A.

The program mode consists of the following sequence of events. With the level on  $\bar{G}/V_{pp}$  equal to 21 V, data to be programmed is applied in parallel to output pins Q8-Q1. The location to be programmed is addressed. Once data and addresses are stable, a 10-millisecond TTL low-level pulse is applied to  $\bar{E}$ . The maximum width of this pulse is 11 milliseconds. The programming pulse must be applied at each location that is to be programmed. Locations may be programmed in any order.

Several TMS27P32As can be programmed simultaneously by connecting them in parallel and following the programming sequence previously described.


### program verify

After the PROM has been programmed, the programmed bits should be verified. To verify bit states,  $\bar{G}/V_{pp}$  and  $\bar{E}$  are set to  $V_{IL}$ .

### program inhibit

The program inhibit is useful when programming multiple TMS27P32As connected in parallel with different data. Program inhibit can be implemented by applying a high-level signal to  $\bar{E}$  of the device that is not to be programmed.

logic symbol†

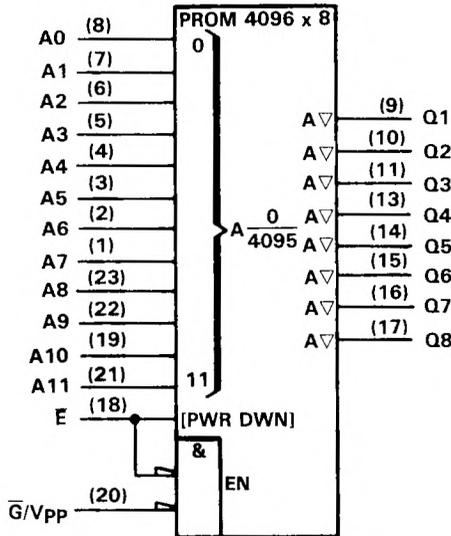

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†**

Supply voltage range, $V_{CC}$ .....	-0.3 V to 7 V
Supply voltage range, $V_{pp}$ .....	-0.3 V to 22 V
Input voltage range (except program) .....	-0.3 V to 7 V
Output voltage range .....	-0.3 V to 7 V
Operating free-air temperature .....	0°C to 70°C
Storage temperature range .....	-65°C to 125°C

† Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the "Recommended Operating Conditions" section of this specification is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

# TMS27P32A 32,768-BIT PROGRAMMABLE READ-ONLY MEMORY

## recommended operating conditions

		MIN	NOM	MAX	UNIT
V <sub>CC</sub>	Supply voltage (see Note 1)	4.75	5	5.25	v
V <sub>PP</sub>	Supply voltage (see Note 2)	V <sub>CC</sub>			V
V <sub>IH</sub>	High-level input voltage	2		V <sub>CC</sub> +1	V
V <sub>IL</sub>	Low-level input voltage	-0.1		0.8	V
T <sub>A</sub>	Operating free-air temperature	0		70	°C

- NOTES: 1. V<sub>CC</sub> must be applied before or at the same time as V<sub>PP</sub> and removed after or at the same time as V<sub>PP</sub>. The device must not be inserted into or removed from the board when V<sub>PP</sub> or V<sub>CC</sub> is applied.  
 2. V<sub>PP</sub> can be connected to V<sub>CC</sub> directly (except in the program mode). V<sub>CC</sub> supply current in this case would be I<sub>CC</sub> + I<sub>PP</sub>. During programming, V<sub>PP</sub> must be maintained at 21 V (±0.5 V).

## electrical characteristics over full ranges of recommended operating conditions

PARAMETER	TEST CONDITIONS	MIN	MAX	UNIT
V <sub>OH</sub>	High-level output voltage I <sub>OH</sub> = -400 μA	2.4		v
V <sub>OL</sub>	Low-level output voltage I <sub>OL</sub> = 2.1 mA		0.45	V
I <sub>I</sub>	Input current (leakage) V <sub>I</sub> = 0 V to 5.25 V		±10	μA
I <sub>O</sub>	Output current (leakage) V <sub>O</sub> = 0.4 V to 5.25 V		±10	μA
I <sub>CC1</sub>	V <sub>CC</sub> supply current (standby) E at V <sub>IH</sub> , G at V <sub>IL</sub>		30	mA
I <sub>CC2</sub>	V <sub>CC</sub> supply current (active) E and G at V <sub>IL</sub>		125	mA

## capacitance over recommended supply voltage range and operating free-air temperature range, f = 1 MHz†

PARAMETER	TEST CONDITIONS	TYP‡	MAX	UNIT	
C <sub>i</sub>	Input capacitance All except G/V <sub>PP</sub> G/V <sub>PP</sub>	V <sub>I</sub> = 0 V	4	6	pF
			20		
C <sub>o</sub>	Output capacitance V <sub>O</sub> = 0 V	8	12	pF	

† Capacitance measurements are made on a sample basis only.

‡ Typical values are at T<sub>A</sub> = 25 °C and nominal voltages.

## switching characteristics over recommended supply voltage range and operating free-air temperature range

PARAMETER	TEST CONDITIONS (SEE NOTE 3)	TMS27P32A-25		TMS27P32A-30		TMS27P32A-45		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
t <sub>a(A)</sub>	Access time from address			300				ns
t <sub>a(E)</sub>	Access time from E		250	300		450		ns
t <sub>en(G)</sub>	Output enable time from G		100	150		150		ns
t <sub>dis</sub> †	Output disable time from G or E, whichever occurs first	0	85	0	105	0	130	ns
t <sub>v(A)</sub>	Output data valid time after change of address, E, or G, whichever occurs first	0		0		0		ns

NOTE 3: The timing reference levels for inputs and outputs are 0.8 V and 2 V. Input pulse levels are 0.40 V and 2.4 V.

† Value calculated from 0.5 V delta to measured output level. This parameter is only sampled and not 100% tested.

6

EPROMS/PROMS

recommended conditions for programming,  $T_A = 25^\circ\text{C}$  (see Note 4)

		MIN	NOM	MAX	UNIT
V <sub>CC</sub>	Supply voltage	4.75	5	5.25	V
V <sub>PP</sub>	Supply voltage	20.5	21	21.5	V
V <sub>IH</sub>	High-level input voltage	2		V <sub>CC</sub> +1	V
V <sub>IL</sub>	Low-level input voltage	-0.1		0.8	V
t <sub>w</sub> (E)	$\bar{E}$ pulse duration	9	10	11	ms
t <sub>su</sub> (A)	Address setup time	2			$\mu\text{s}$
t <sub>su</sub> (D)	Data setup time	2			$\mu\text{s}$
t <sub>su</sub> (V <sub>PP</sub> )	V <sub>pp</sub> setup time	2			$\mu\text{s}$
t <sub>h</sub> (A)	Address hold time	0			$\mu\text{s}$
t <sub>h</sub> (D)	Data hold time	2			$\mu\text{s}$
t <sub>h</sub> (V <sub>PP</sub> )	V <sub>pp</sub> hold time	2			$\mu\text{s}$
t <sub>rec</sub> (PG)	V <sub>pp</sub> recovery time	2			$\mu\text{s}$
t <sub>r</sub> (PG)G	$\bar{G}$ rise time during programming	50			ns
t <sub>EHD</sub>	Delay time, data valid after $\bar{E}$ low			1	$\mu\text{s}$

NOTE 4: When programming the TMS27P32A, connect a 0.1  $\mu\text{F}$  capacitor between V<sub>pp</sub> and GND to suppress spurious voltage transients which may damage the device.

programming characteristics,  $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V <sub>IH</sub>	High-level input voltage	2		V <sub>CC</sub> +1	V
V <sub>IL</sub>	Low-level input voltage	-0.1		0.8	V
V <sub>OH</sub>	High-level output voltage (verify)	I <sub>OH</sub> = -400 $\mu\text{A}$	2.4		V
V <sub>OL</sub>	Low-level output voltage (verify)	I <sub>OL</sub> = 2.1 mA		0.45	V
I <sub>I</sub>	Input current (all inputs)	V <sub>I</sub> = V <sub>IL</sub> or V <sub>IH</sub>		10	$\mu\text{A}$
I <sub>pp</sub>	Supply current	$\bar{E} = V_{IL}, \bar{G} = V_{PP}$		50	mA
I <sub>CC</sub>	Supply current			..	mA
t <sub>dis</sub> (PR)	Output disable time	0		130	ns

### PARAMETER MEASUREMENT INFORMATION


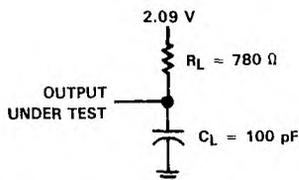



FIGURE 1. TYPICAL OUTPUT LOAD CIRCUIT

**TMS27P32A**  
**32,768-BIT PROGRAMMABLE READ-ONLY MEMORY**


**read cycle timing**

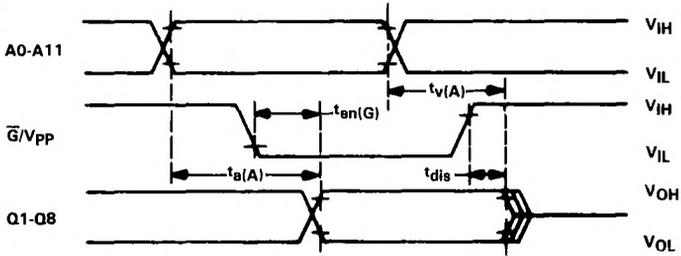

**standby mode**

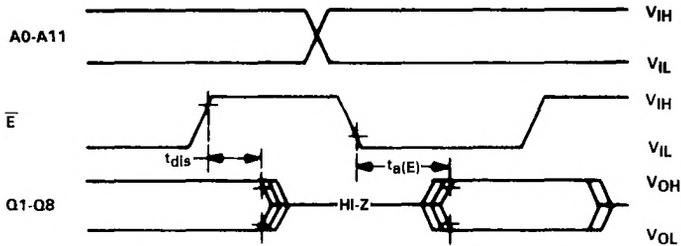


**program cycle timing**

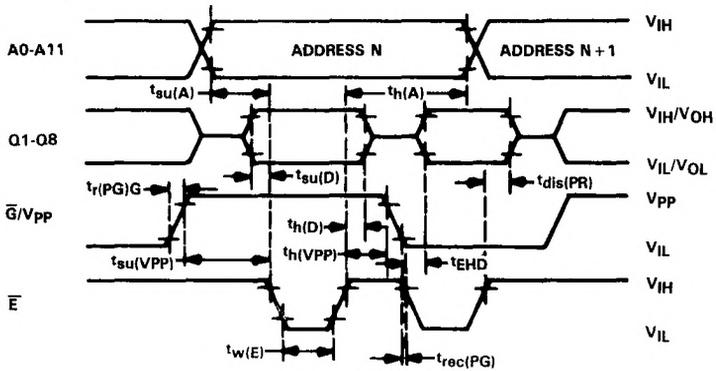

- Organization . . . 8192 X 8
- Single 5-V Power Supply
- Pin Compatible with TMS2732A and TMS2764 EPROMs
- All Inputs and Outputs Are TTL Compatible
- Max Access/Min Cycle Time  
TMS27P64-25 250 ns  
TMS27P64-30 300 ns  
TMS27P64-45 450 ns
- Low Standby Power Dissipation . . .  
184 mW (MAX)
- JEDEC Approved Pinout
- 21-V Power Supply Required for Programming
- Fast Programming Algorithm
- N-Channel Silicon-Gate Technology

**N PACKAGE  
(TOP VIEW)**

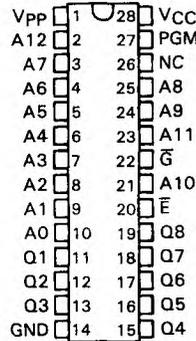

PIN NOMENCLATURE	
A0-A12	Address Inputs
$\bar{E}$	Chip Enable
$\bar{G}$	Output Enable
GND	Ground
NC	No Connection
PGM	Program
Q1-Q8	Outputs
VCC	5-V Power Supply
Vpp	21-V Power Supply

**description**

The TMS27P64 is a one-time, electrically programmable read-only memory. It has 65,536 bits organized as 8,192 words of 8-bit length. The TMS27P64-25 only requires a single 5-volt power supply with a tolerance of  $\pm 5\%$ , and has a maximum access time of 250 ns.

The TMS27P64 provides two output control lines: Output Enable ( $\bar{G}$ ) and Chip Enable ( $\bar{E}$ ). This feature allows the  $\bar{G}$  control line to eliminate bus contention in microprocessor systems. The TMS27P64 has a power-down mode that reduces maximum active current from 150 mA to 35 mA when the device is placed on standby.

This PROM is supplied in a 28-pin, 15,24-mm (600-mil) dual-in-line plastic package and is designed for operation from 0°C to 70°C.

**6  
EPROMs/PROMs**

# TMS27P64

## 65,536-BIT PROGRAMMABLE READ-ONLY MEMORY

### operation

The six modes of operation for the TMS27P64 are listed in the following table.

FUNCTION (PINS)	MODE					
	Read	Output Disable	Power Down (Standby)	Fast Programming	Program Verification	Inhibit Programming
$\bar{E}$ (20)	$V_{IL}$	X	$V_{IH}$	$V_{IL}$	$V_{IL}$	$V_{IH}$
$\bar{G}$ (21)	$V_{IL}$	$V_{IH}$	X	$V_{IH}$	$V_{IL}$	X
$\bar{OEN}$ (27)	$V_{IH}$	$V_{IH}$	X	$V_{IL}$	$V_{IH}$	X
$V_{PP}$ (1)	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{PP}$	$V_{PP}$	$V_{PP}$ or $V_{CC}$
$V_{CC}$ (28)	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{CC}$
Q1-Q8 (11 to 13, 15 to 19)	Q	HI-Z	HI-Z	D	Q	HI-Z

X =  $V_{IL}$  or  $V_{IH}$

#### read

The dual control pins ( $\bar{E}$  and  $\bar{G}$ ) must have low-level TTL signals in order to provide data at the outputs. Chip enable ( $\bar{E}$ ) should be used for device selection. Output enable ( $\bar{G}$ ) should be used to gate data to the output pins.

#### power down

The power-down mode reduces the maximum active current from 150 mA to 35 mA. A TTL high-level signal applied to  $\bar{E}$  selects the power-down mode. In this mode, the outputs assume a high-impedance state, independent of  $\bar{G}$ .

#### fast programming

Note that the application of a voltage in excess of 22 V to  $V_{PP}$  may damage the TMS27P64.

Initially all locations are logic "1's," logic "0's" are programmed into the desired locations. Programming consists of the following sequence of events. With the level on  $V_{PP}$  equal to 21 V and  $\bar{E}$  at TTL low, data to be programmed is applied in parallel to output pins Q8-Q1. The location to be programmed is addressed. Once data and addresses are stable, a TTL low-level pulse is applied to  $\bar{PGM}$ . Programming pulses must be applied at each location that is to be programmed. Locations may be programmed in any order.

Programming uses two types of programming pulse: Prime and Final. The length of the Prime pulse is 1 millisecond; this pulse is applied X times. After each application the byte being programmed is verified. If the correct data is read, the Final programming pulse is then applied, if correct data is not read, a further 1 millisecond programming pulse is applied up to a maximum X of 15. The Final programming pulse is 4X milliseconds long. This sequence of programming pulses and byte verification is done at  $V_{CC} = 6.0$  V and  $V_{PP} = 21.0$  V. When the full fast programming routine is complete, all bits are verified with  $V_{CC} = V_{PP} = 5$  V. A flowchart of the fast programming routine is shown in Figure 1.

#### multiple device programming

Several TMS27P64's can be programmed simultaneously by connecting them in parallel and following the programming sequence previously described.

program inhibit

The program inhibit is useful when programming multiple TMS27P64's connected in parallel with different data. Program inhibit can be implemented by applying a high-level signal to  $\bar{E}$  or  $\overline{PGM}$  of the device that is not to be programmed.


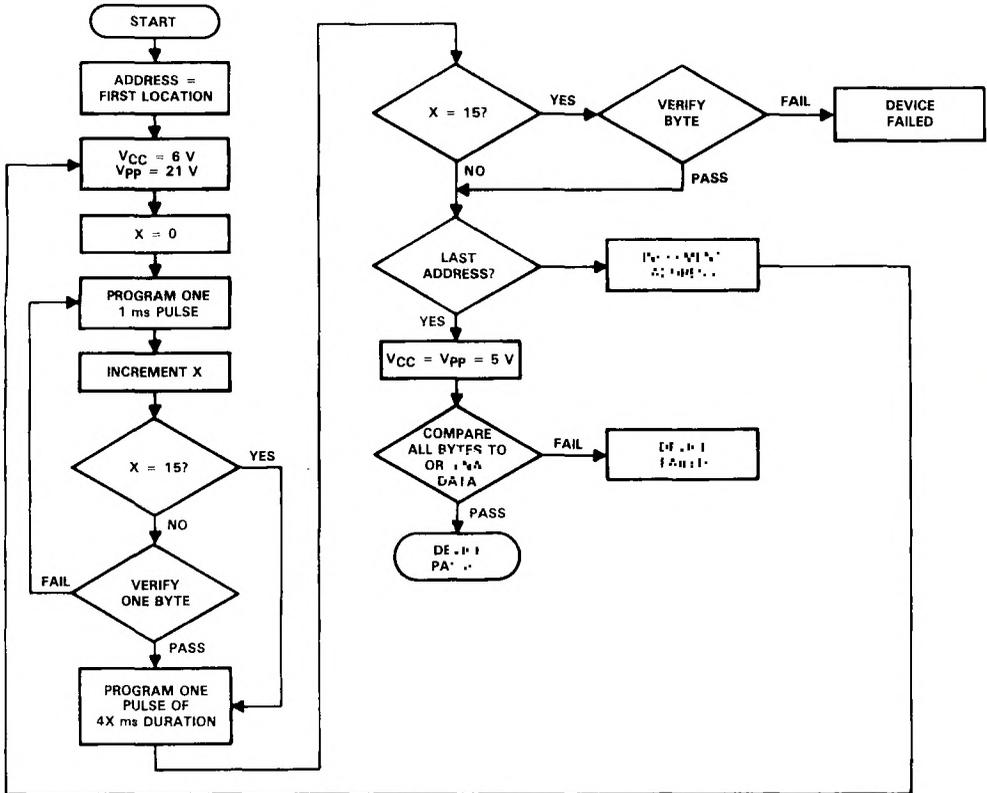


FIGURE 1. FAST PROGRAMMING FLOWCHART

6  
EPROMs/PROMs

# TMS27P64 65,536-BIT PROGRAMMABLE READ-ONLY MEMORY

logic symbol†

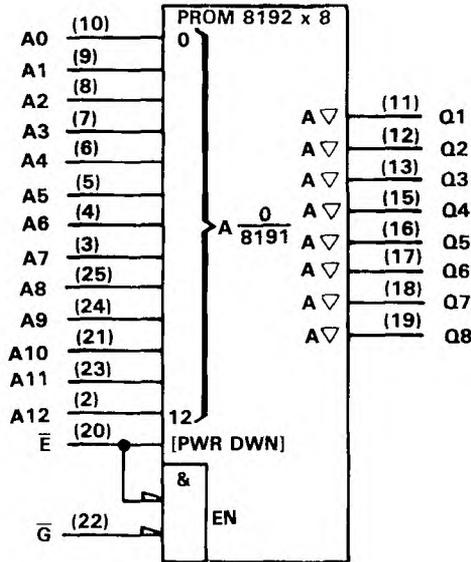

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, $V_{CC}$ .....	-0.6 V to 7 V
Supply voltage range, $V_{PP}$ .....	-0.6 V to 22 V
Input voltage range .....	-0.6 V to 7 V
Output voltage range .....	-0.6 V to 7 V
Operating free-air temperature .....	0°C to 70°C
Storage temperature range .....	-65°C to 125°C

† Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the "Recommended Operating Conditions" section of this specification is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

## recommended operating conditions

		MIN	NOM	MAX	UNIT
$V_{CC}$	Supply voltage	4.75	5	5.25	V
$V_{PP}$	Supply voltage		$V_{CC}$		V
$V_{IH}$	High-level input voltage			$V_{CC} + 1$	V
$V_{IL}$	Low-level input voltage (see Note 1).	-0.1		0.8	V
$T_A$	Operating free-air temperature	0		70	°C

NOTE 1: The algebraic convention, where the more negative (less positive) limit is designated as minimum is used in this data sheet for logic voltage levels only.

# TMS27P64

## 65,536-BIT PROGRAMMABLE READ-ONLY MEMORY

### electrical characteristics over full ranges of recommended operating conditions

PARAMETER		TEST CONDITIONS	MIN	MAX	UNIT
$V_{OH}$	High-level output voltage	$I_{OH} = -400 \mu A$	2.4		V
$V_{OL}$	Low-level output voltage	$I_{OL} = 2.1 \text{ mA}$		0.45	V
$I_I$	Input current (load)	$V_I = 0 \text{ V to } 5.25 \text{ V}$		$\pm 10$	$\mu A$
$I_O$	Output current (leakage)	$V_O = 0.4 \text{ V to } 5.25 \text{ V}$		$\pm 10$	$\mu A$
$I_{PP1}$	$V_{PP}$ supply current (read)	$V_{PP} = 5.25 \text{ V}$		15	mA
$I_{PP2}$	$V_{PP}$ supply current (program)	$\bar{E}$ and $\bar{F}^{\dagger}$ at $V_{IL}$		50	mA
$I_{CC1}$	$V_{CC}$ supply current (standby)	$\bar{E}$ at $V_{IH}$		35	mA
$I_{CC2}$	$V_{CC}$ supply current (active)	$\bar{E}$ and $\bar{G}$ at $V_{IL}$		150	mA

### capacitance over recommended supply voltage range and operating free-air temperature range, $f = 1 \text{ MHz}^{\dagger}$

PARAMETER		TEST CONDITIONS	TYP <sup>‡</sup>	MAX	UNIT
$C_i$	Input capacitance	$V_I = 0 \text{ V}$	4	6	pF
$C_o$	Output capacitance	$V_O = 0 \text{ V}$	8	12	pF

<sup>†</sup>Capacitance measurements are made on a sample basis only.

<sup>‡</sup>Typical values are at  $T_A = 25^{\circ}\text{C}$  and nominal voltages.

### switching characteristics over recommended supply voltage range and operating free-air temperature range, $C_L = 100 \text{ pF}$ , 1 Series 74 TTL load (see Note 2 and Figure 2)

PARAMETER		TMS27P64-25		TMS27P64-30		TMS27P64-45		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
$t_{a(A)}$	Access time from address	250		300		450		ns
$t_{a(E)}$	Access time from $\bar{E}$	250		300		450		ns
$t_{en(G)}$	Output enable time from $\bar{G}$	100		120		150		ns
$t_{dis(G)}^{\ddagger}$	Output disable time from $\bar{G}$	0	85	0	105	0	130	ns
$t_{v(A)}$	Output data valid time after change of address, $\bar{E}$ , or $\bar{G}$ , whichever occurs first	0		0		0		ns

NOTE 2: For all switching characteristics and timing measurements, input pulse levels are 0.40 V and 2.4 V. Input and output timing reference levels are 0.8 V and 2 V.

<sup>‡</sup>Value calculated from 0.5 volt delta to measured output level;  $t_{dis(G)}$  is specified from  $\bar{G}$  or  $\bar{E}$ , whichever occurs first. Refer to read cycle timing diagram. This parameter is only sampled and is not 100% tested.

6  
EPROMs/PROMS

# TMS27P64

## 65,536-BIT PROGRAMMABLE READ-ONLY MEMORY

recommended conditions for fast programming routine,  $T_A = 25^\circ\text{C}$  (see Note 2 and fast programming cycle timing diagram)


		MIN	NOM	MAX	UNIT
$V_{CC}$	Supply voltage (see Note 3)	5.75	6	6.25	V
$V_{PP}$	Supply voltage (see Note 4)	20.5	21	21.5	V
$t_w(\text{IPGM})$	PGM initial program pulse duration (see Note 5)	0.95	1	1.05	ms
$t_w(\text{FPGM})$	PGM final pulse duration (see Note 6)	3.8		63	ms
$t_{su}(\text{A})$	Address setup time	2			$\mu\text{s}$
$t_{su}(\text{D})$	Data setup time	2			$\mu\text{s}$
$t_{su}(\text{VPP})$	$V_{PP}$ setup time	2			$\mu\text{s}$
$t_{su}(\text{VCC})$	$V_{CC}$ setup time	2			$\mu\text{s}$
$t_h(\text{A})$	Address hold time	0			$\mu\text{s}$
$t_h(\text{D})$	Data hold time	2			$\mu\text{s}$
$t_{su}(\text{E})$	$\bar{E}$ setup time	2			$\mu\text{s}$
$t_{su}(\text{G})$	$\bar{G}$ setup time	2			$\mu\text{s}$

fast programming characteristics,  $T_A = 25^\circ\text{C}$  (see Note 2 and fast programming cycle timing diagram)

PARAMETER	TEST CONDITIONS	MIN	MAX	UNIT
$t_{dis}(\text{G})\text{FP}$	Output disable time from $\bar{G}$ (see Note 7)	0	130	ns
$t_{en}(\text{G})\text{FP}$	Output enable time from $\bar{G}$		150	

- NOTES: 2. For all switching characteristics and timing measurements, input pulse levels are 0.40 V and 2.4 V. Input and output timing reference levels are 0.8 V and 2 V.
3.  $V_{CC}$  must be applied simultaneously or before  $V_{PP}$  and removed simultaneously or after  $V_{PP}$ .
4. When programming the TMS27P64, connect a 0.1  $\mu\text{F}$  capacitor between  $V_{PP}$  and GND to suppress spurious voltage transients which may damage the device.
5. The Initial program pulse duration tolerance is  $1\text{ ms} \pm 5\%$ .
6. The length of the Final pulse will vary from 3.8 ms to 63 ms depending on the number of Initial pulse applications (X).
7. This parameter is only sampled and is not 100% tested.


**PARAMETER MEASUREMENT INFORMATION**

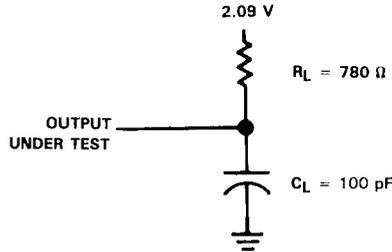

NOTE 8:  $t_f \leq 20 \text{ ns}$  and  $t_r \leq 20 \text{ ns}$ .


**FIGURE 2. TYPICAL OUTPUT LOAD CIRCUIT**

**read cycle timing**

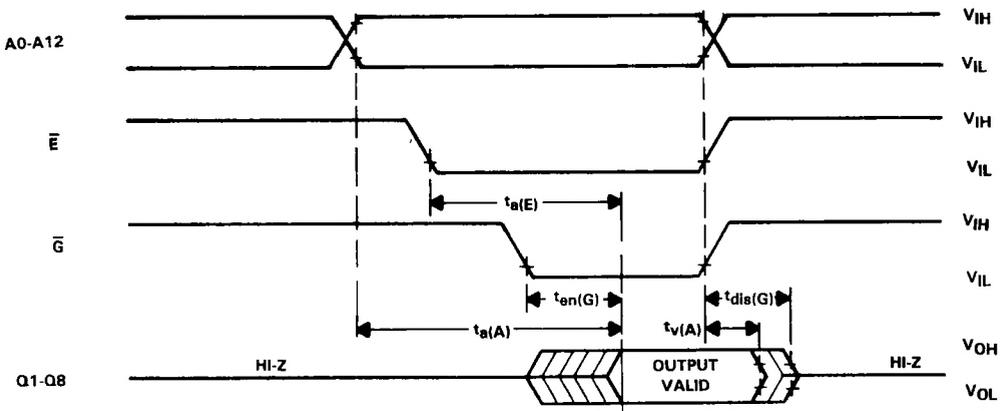

**TMS27P64**  
**65,536-BIT PROGRAMMABLE READ-ONLY MEMORY**


**fast program cycle timing**

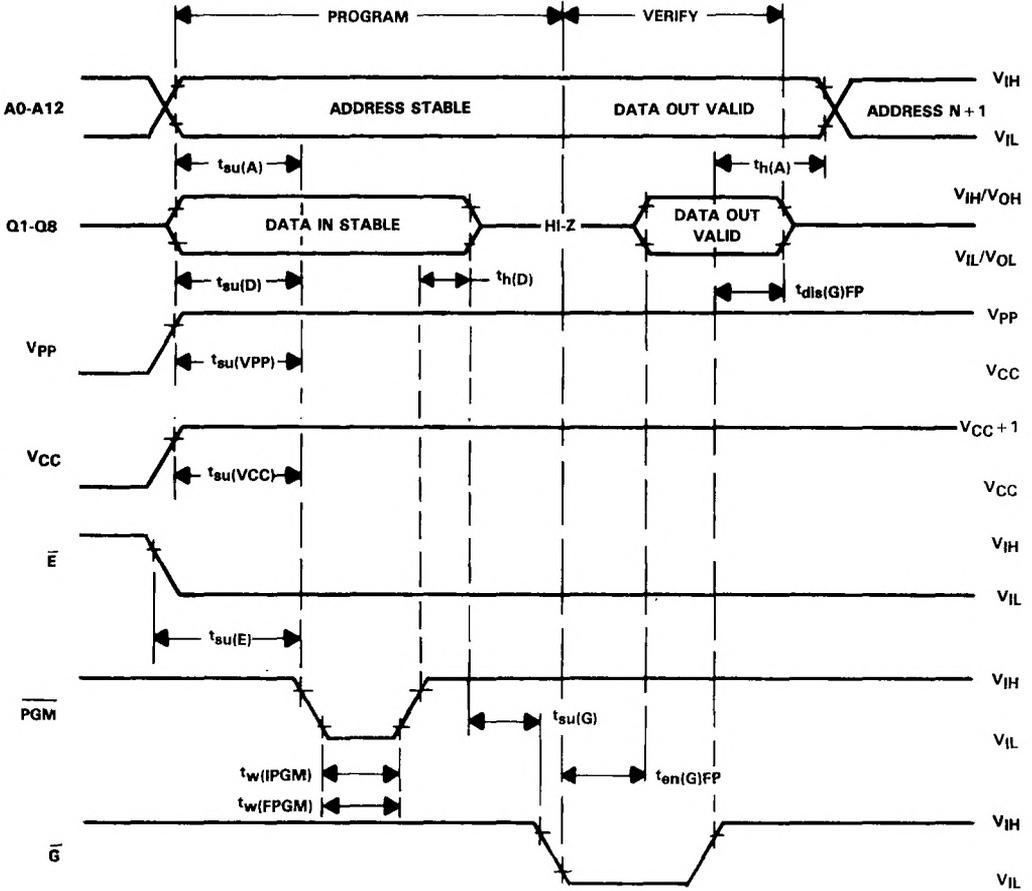

6 EPROMs/PROMs

- Organization . . . 16K × 8
- Single 5-V Power Supply
- Pin Compatible with Existing 64K and 128K EPROMs
- All Inputs/Outputs Fully TTL Compatible
- Max Access/Min Cycle Time
 

'27PC128-2,	'27PC128-20	200 ns
'27PC128,	'27PC128-25	250 ns
'27PC128-3,	'27PC128-30	300 ns
'27PC128-4,	'27PC128-45	450 ns
- HVCMOS Technology
- 3-State Output Buffers
- 400 mV Guaranteed DC Noise Immunity with Standard TTL Loads
- Low Power Dissipation ( $V_{CC} = 5.25\text{ V}$ )
  - Active . . . 210 mW Worst Case
  - Standby . . . 1.4 mW Worst Case (CMOS-Input Levels)

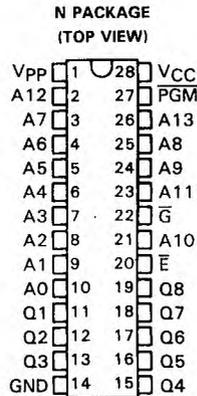

PIN NOMENCLATURE	
A0-A13	Address Inputs
$\bar{E}$	Chip Enable/Power Down
$\bar{G}$	Output Enable
GND	Ground
PGM	Program
Q1-Q8	Outputs
VCC	5-V Power Supply
VPP	12.5-V Power Supply

**description**

The TMX27PC128 series are 131,072-bit, one-time, electrically programmable read-only memories. These devices are fabricated using HVCMOS technology for high speed and simple interface with MOS and bipolar circuits. All inputs (including program data inputs) can be driven by Series 74 TTL circuits without the use of external pull-up resistors, and each output can drive one Series 74 TTL circuit without external resistors. The data outputs are three state for connecting multiple devices to a common bus. The TMX27PC128 is pin compatible with existing 28-pin ROMs and EPROMs. It is offered in a dual-in-line plastic package (N suffix) rated for operation from 0°C to 70°C.

Since these PROMs operate from a single 5-V supply (in the read mode), they are ideal for use in microprocessor-based systems. One other (12.5 V) supply is needed for programming, but all programming signals are TTL level. For programming outside the system, existing EPROM programmers can be used. Locations may be programmed singly, in blocks, or at random.


**EPROMs/PROMs**



- Organization . . . 32K × 8
- Single 5-V Power Supply
- Pin Compatible with Existing 64K, 128K and 256K EPROMs
- All Inputs/Outputs Fully TTL Compatible
- Max Access/Min Cycle Time
 

'27PC256-2,	'27PC256-20	200 ns
'27PC256,	'27PC256-25	250 ns
'27PC256-3,	'27PC256-30	300 ns
'27PC256-4,	'27PC256-45	450 ns
- HVCMOS Technology
- 3-State Output Buffers
- 400 mV Guaranteed DC Noise Immunity with Standard TTL Loads
- Low Power Dissipation ( $V_{CC} = 5.25\text{ V}$ )
  - Active . . . 210 mW Worst Case
  - Standby . . . 1.4 mW Worst Case
 (CMOS-Input Levels)

**N PACKAGE  
(TOP VIEW)**

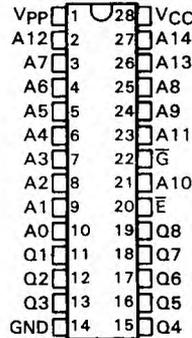

PIN NOMENCLATURE	
A0-A14	Address Inputs
$\bar{E}$	Chip Enable/Power Down
$\bar{G}$	Output Enable
GND	Ground
Q1-Q8	Outputs
$V_{CC}$	5-V Power Supply
$V_{PP}$	12.5-V Power Supply

**description**

The TMX27PC256 series are 262,144-bit, one-time, electrically programmable read-only memories. These devices are fabricated using HVCMOS technology for high speed and simple interface with MOS and bipolar circuits. All inputs (including program data inputs) can be driven by Series 74 TTL circuits without the use of external pull-up resistors, and each output can drive one Series 74 TTL circuit without external resistors. The data outputs are three state for connecting multiple devices to a common bus. The TMX27PC256 is pin compatible with existing 28-pin ROMs and EPROMs. It is offered in a dual-in-line plastic package (N suffix) rated for operation from 0°C to 70°C.

Since these PROMs operate from a single 5-V supply (in the read mode), they are ideal for use in microprocessor-based systems. One other (12.5 V) supply is needed for programming, but all programming signals are TTL level. For programming outside the system, existing EPROM programmers can be used. Locations may be programmed singly, in blocks, or at random.

**6**  
EPROMs/PROMs