
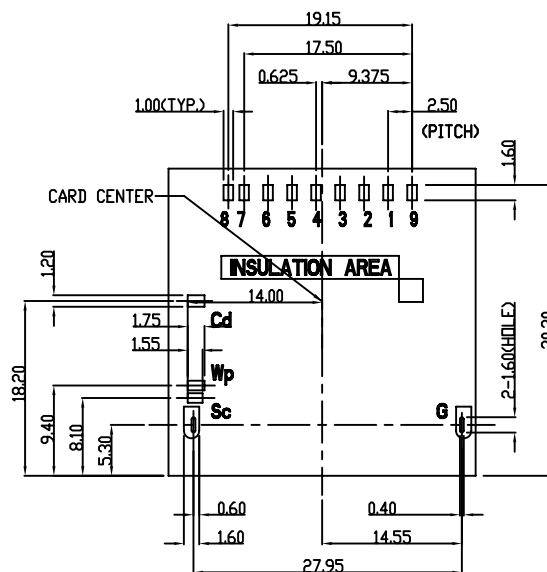
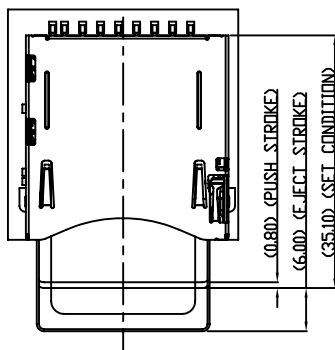

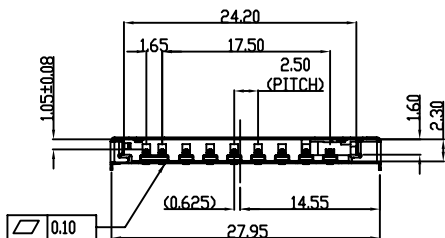
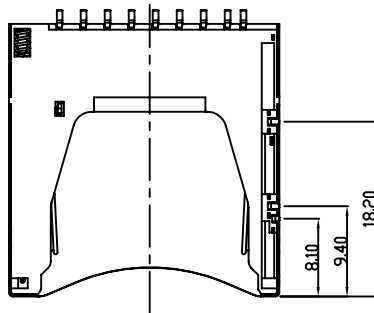
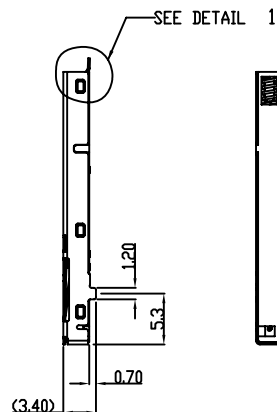


1		2		3	
Card detection switch		Write protection switch			
When card is ejected	When card is inserted	When card is ejected	When card is inserted		
OPEN	CLOSE	OPEN	Write protect	Write enable	CLOSE
 Cd Sc	 Cd Sc	 Wp Sc	 Wp Sc	 Wp Sc	 Wp Sc

PIN NO.	PIN ASSIGNMENT	PIN NO.	PIN ASSIGNMENT	ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	DAT3/CS/CD	8	DAT1	1	BODY	1	LCP	
2	CMD	9	DAT2	2	SLIDER	1	LCP	
3	VSS1	Wp	WRITE PROTECTION	3	CONTACT	9	PHOSPHOR BRONZE	GOLD 10u"
4	VDD	Cd	CARD DETECTION	4	WRITE PROTECTION PIN	1	PHOSPHOR BRONZE	GOLD FLASH
5	CLK	Sc	COMMON PIN	5	CARD DETECTION PIN	1	PHOSPHOR BRONZE	GOLD FLASH
6	VSS2	G	SDIO / GROUND	6	COMMON PIN	1	PHOSPHOR BRONZE	GOLD FLASH
7	DAT0			7	LATCH	1	STAINLESS	
				8	SHELL	1	STAINLESS	GOLD FLASH
				9	DRAG LINK	1	STAINLESS	
				10	SPRING	1	PIANO WIRE	NICKEL PLATE

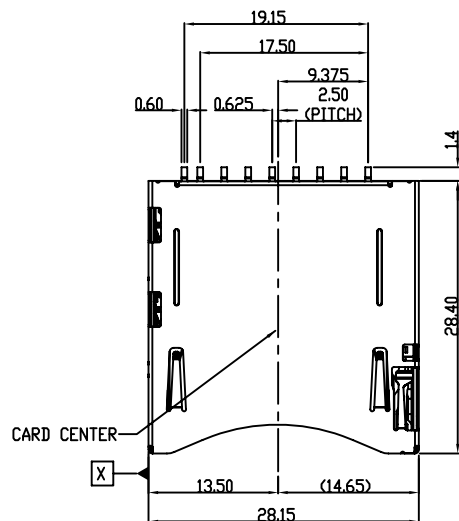

RECOMMENT PC BOARD LAYOUT
GENERAL TOLERANCE: ±0.05mm

Note:
Card Release Force: 6N~9N

104H-T D A 0-R
1 2 3 4

1.Type
T:Top Mount

2.Contact Plating
D:10u" gold plating

3.Stand Off Dimention
A:0mm

4.RoHS

						UNLESS OTHERWISE SPECIFIED TOLERANCE						
						ANGLES	ANG.	±5°				
						LINEAR	0.	±0.3				
							0.0	±0.25				
							0.00	±0.20				
						SCALE	AS SHOWN	UNIT: mm	www.attend.com.tw			
A	 Revise:					DRAWN	Willis	2012/08/03	DRAWN NAME: SD Socket Top Mount Push-Push Type,Card Lock Function			
	 Revise:					CHECKED	Angel	2012/08/03				
	 Revise:					APPROVED	Ken	2012/08/03	PRODUCT NO.	104H-TDA0-R		
REV.	DESCRIPTION		DATE	REV.	DESCRIPTION		DATE		SIZE A4	REV. 1.0	FILE NAME	104H-TDA0-R_B_2
	1	2	3	4	5	6	7		8		9	10