Solder side Possible Block out Version 0.5d

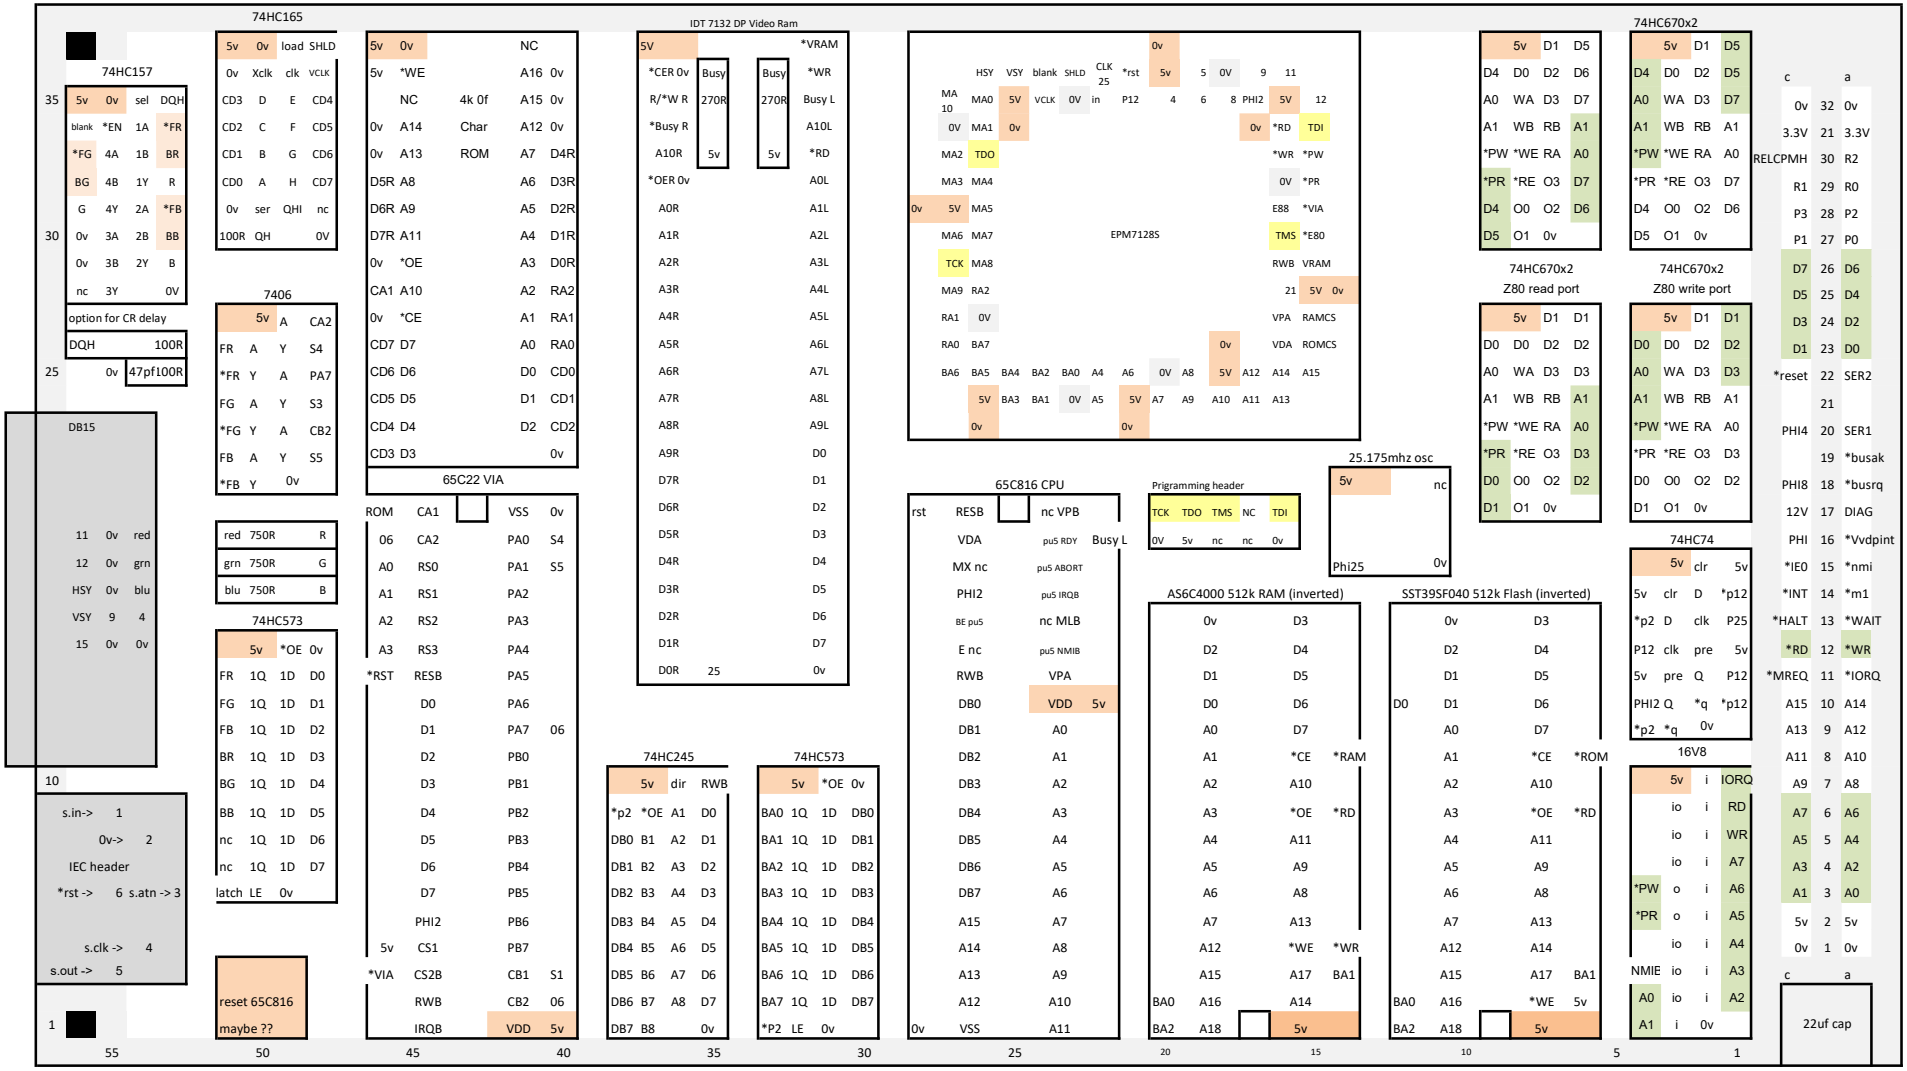

Ensure ram cannot be written to whebn PHI2 is low
Pet used CA2 on the VIA to switch the character sets have to use CA1 ??
VIC20 uses VIA 2 CA2 via 7406 to drive serial connection pin 4
VIC20 uses VIA1 PA0 for serial clock in

VIC20 uses VIA1 PA1 for serial data in
VIC20 uses VIA1 PA7 via 7406 for serial ATN OUT pin 3
1 k pull ups on serial pins 3,4,5

VIC20 uses VIA2 CB1 for serial SRQ in
VIC20 uses VIA2 CB2 via 7406 for serial data out pin 5